

# Product Catalog.

CELLULAR SIGNAL COVERAGE SOLUTIONS  
FOR COMMERCIAL BUILDINGS





# Contents

## ABOUT US

About weBoost	4
Why WilsonPro?	6
How WilsonPro Works	8

## COMMERCIAL SOLUTIONS

Line-Up Sheet	11
Pro 70 Plus Select (50 Ohm)	15
Pro 4000R/4000	17
Pro 70 (50 Ohm)	19
Pro 70 (75 Ohm)	21
Pro 70 Plus (50 Ohm)	23
Pro 70 Plus (75 Ohm)	25
Pro 1000R/1000	27
Pro 1050	29

Signal 4G	31
Signal 3G	33
Pro Signal Meter	35

## ACCESSORIES

Antennas (In-Depth)	37
Accessories	43
Mounts	45
Replacements and Tools	45
Splitters and Taps	46
Cables and Connectors	47
Attenuators	49
Lightning Surge Protector	49
Channelized Filters	49
Power Supplies	50

Warranty	51
----------	----



# About WilsonPro

## WHO WE ARE

WilsonPro is one of the country's leading manufacturers of commercial cellular signal enhancement technologies. Our brand of professional cell signal boosters is powerful and advanced, designed to help you get the strongest cell signal possible, wherever you need it. Our systems are well-suited for virtually any scope of project and ideal for commercial, security, or fleet solutions.

We also offer benefits like an industry-leading three-year warranty on any of our products installed by WilsonPro certified professionals. We are dedicated to top-of-the-line products, superior customer service, and excellent installer partnerships—traits that make WilsonPro truly stand apart from the competition.



## Our Story

Founded by Jim Wilson, who as a kid loved amateur radio and after receiving his ham radio license at 14 years old started making antennas in his parent's garage. And in 1968 started his first of many successful companies, Wilson Antenna, manufacturing and selling CB antennas and two-way radios.

Eventually, Wilson Antenna became the market leader and its products were seen as a status symbol for truckers.

## Fueled by Passion

In 1997, Jim was working away from home and wasn't able to stay connected with his family due to spotty cell phone coverage. This planted the idea for "cell phone signal boosting systems".

After three years of intense research and development, Jim invented and patented the first cellular signal boosting solution giving way to who we are now, Wilson Electronics. Now, several years later we continue to innovate, develop, and pioneer technology as the industry market leader. We hold over 40 cellular signal boosting patents.

## We are passionate about our work



Established in 2000  
in St. George, Utah



Recognized global leader  
in cellular boosting technology



Market Innovator with over  
40 U.S. cellular signal patents


# Why WilsonPro?

WilsonPro commercial cellular signal boosters provide reliable, flexible solutions for large buildings and businesses experiencing poor cell and data reception. Our high-performance cellular signal boosters are designed to deliver the greatest coverage in terms of physical space for any or all carriers.

From the initial site survey, to expert design assistance, to fast and cost-effective installation, the WilsonPro process along with our partners provide tailored and reliable cellular signal boosting solutions from start to finish.

## No more dead zones

WilsonPro solutions ensure people are able to use their cellular devices in all needed parts of building, large or small. Mobile devices are critical tools for productivity, job performance and life safety. We ensure they have mobile access – anytime, anywhere.

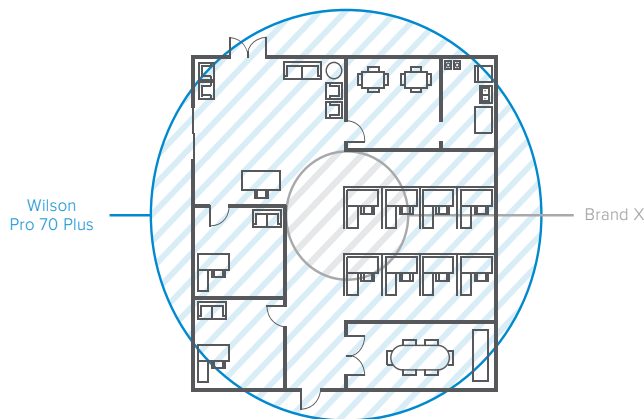


## It takes a system.

### The days of telephone landlines are a thing of the past.

People use their cell phones and cellular-connected devices more than ever, and rely on strong cellular reception in their offices and homes. However, sprawling, large-scale buildings made from concrete, brick, metal, and coated glass can block even the strongest cellular signals.

WilsonPro cellular signal boosters work to capture the available signal outside the building, amplify it, and broadcast it indoors. This way, you can experience better voice quality and flawless data transmissions at work or home.



## Flexible Software

Throughout the day, cell tower signals will “fade and surge”, becoming weaker and stronger at times depending on the number of users on the system. FCC rules require that a cell phone booster must adjust in the presence of a strong tower signal. While WilsonPro products are able to seamlessly manage this signal variability, many competitors products simply shut down, sometimes requiring costly site visits (aka “truck rolls”) and system reboots. As a result, many system integrators are now exclusively using WilsonPro products to improve overall customer satisfaction while reducing costs.



## Uplink and Downlink Power

WilsonPro boosters (Pro70 PLUS and Pro70 PLUS SELECT) take full advantage of the October 2014 FCC rules update, and offer the highest downlink power for greatest indoor coverage, and the highest uplink power for reliable connectivity back to the cell tower.

Why WilsonPro cont.

# Competitive Comparison

FEATURE	PRO 70 PLUS	Brand X	The Wilson Advantage
All Carriers	✓	✓	All major U.S. and Canadian Carriers are supported.
3G/4G LTE	✓	✓	All data speeds are supported.
Max Gain	✓	✓	The Wilson PRO 70 Plus operates at the maximum allowable gain per FCC rules and regulations.
Max Coverage Area	✓	✗	The Wilson PRO70 Plus provides an average of more than 6 times the coverage area over our closest competitor.
Max Distance (from a cell tower)	✓	✗	The Wilson PRO 70 Plus provides an average of 100% more power to the cell site over our closest competitor's product.
Max User Capacity	✓	✗	With an average of 2 times the uplink power over competing boosters, the Wilson PRO 70 Plus allows for more simultaneous users at any given time.

## In Short, Wilson Boosters provide:



### PATENTED AUTOMATIC GAIN CONTROL

WilsonPro products algorithmically adjust themselves to reach FCC ceiling on cellular signal amplification. As a result, there is no way to receive better gain from a cell phone amplifier than ours without carrier approval. That is why in independent tests, our cell phone amplifiers regularly outperform our closest competitor's product, particularly on downlink power. Our Automatic Gain Control also reduces the need for field visits unlike our competitor's product which often requires manual adjustments by the dealer when signal conditions change (such as when a new cell tower is put in place).




### ADVANCED BOARD MANUFACTURING

WilsonPro uses Blind and Buried Vias as well as other advanced manufacturing techniques to isolate noise between board components on our boards. Noise reduction allows WilsonPro to keep our gain closer to FCC limits than our competitor's products. This advanced manufacturing process is one of the reasons WilsonPro manufactures its boosters (including board assembly) in the United States.




### MAXIMIZED TO THE OCTOBER 2014 FCC RULES ON CELLULAR SIGNAL AMPLIFICATION

WilsonPro upgraded all of our products to reach the Oct 2014 FCC rules which enabled higher downlink power than prior rules. Many competitive products were not or have not been upgraded to the ceiling allowed by these new rules.

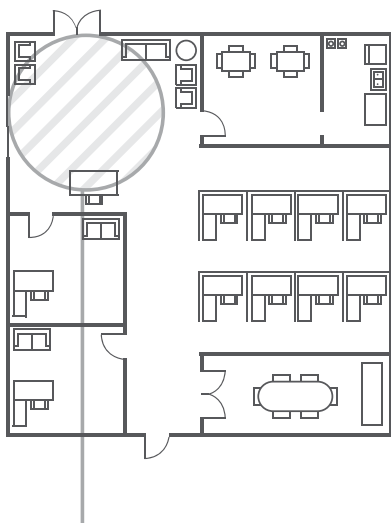

Normal cell coverage

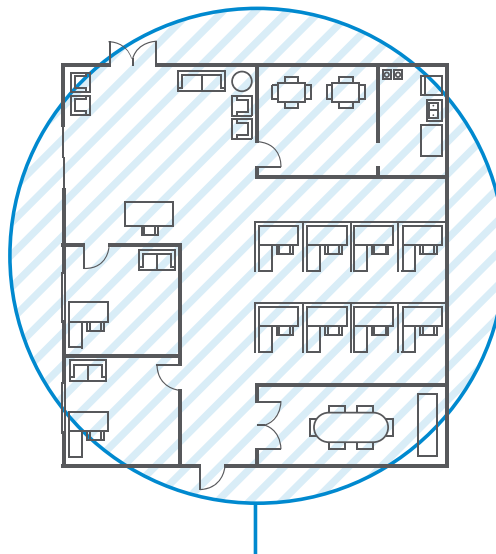

Cell coverage with **WilsonPro**


## How WilsonPro Works

WilsonPro solutions ensure people are able to use their mobile devices in all needed parts of buildings, both large and small. Mobile devices are critical tools for productivity, job performance and life safety. We ensure they have mobile access – anytime, anywhere.

According to data from third party independent lab tests, Wilson Electronics in-building products provide up to 30 times more coverage area than any products offered by its closest competitor.



# How to boost a cellular signal

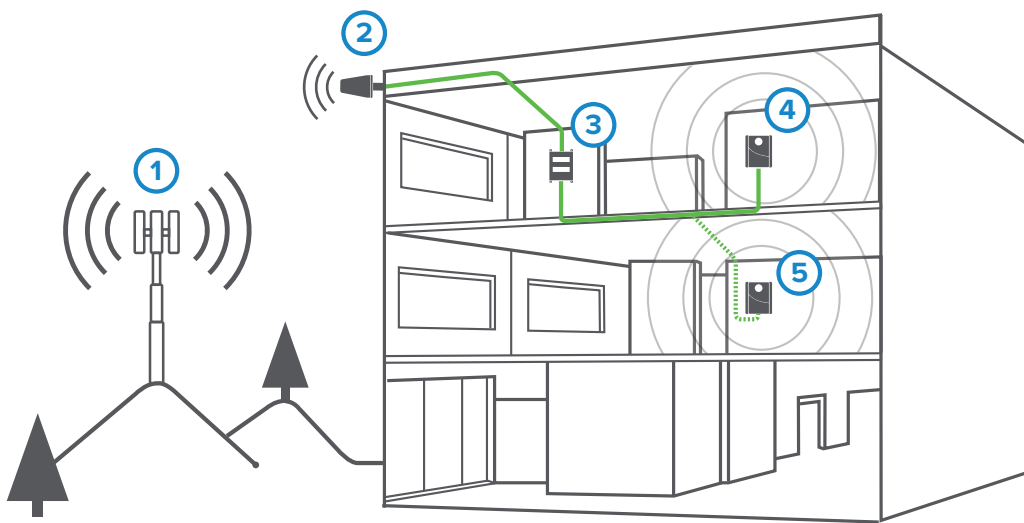

**1 CELL TOWER**  
The Cell Tower transmits and receives the cellular signal

**2 OUTSIDE DIRECTIONAL ANTENNA**  
The signal is received and transmitted by the Outside Antenna

**3 WILSONPRO BOOSTER**  
Our booster amplifies the cellular signal(s) and sends them to the Inside Antenna(s)

**4 INSIDE PANEL ANTENNA**  
The Inside Antenna broadcasts the boosted signal to devices inside the building

**5 ADDITIONAL HARDWARE**  
Additional Antenna/Hardware can be added for Multi-Antenna Installation.



Commercial  
Solutions

# Line Up Sheet

WilsonPro Commercial Boosters



**Pro 4000**  
460223



**Pro 4000R**  
460231



**Pro 1000**  
460236



**Pro 1000R**  
460237



**Pro 1050**  
460230

MOUNTING	Standard Mount	Rack Mount	Standard Mount	Rack Mount	Standard Mount
NUMBER OF INTERNAL ANTENNA PORTS	4 Ports		1 Port		1 Port
COMPATIBILITY	LTE / 4G / 3G				
MAX GAIN	70 dB				
EXTERNAL ANTENNA	Outside Directional Antenna (314411)				
INTERNAL ANTENNA	Inside Dome Antenna x4 (304412)		Inside Dome Antenna (304412)		Inside Dome Antenna (304412)
IMPEDANCE	50 Ohm				
POWER	110-240 V AC, 50-60 Hz, 30 W				
CONNECTORS	N-Female				
CABLE INCLUDED	2' Black Low Loss Wilson400 Cable (952302) 100' Black Low Loss Wilson400 Cables x4 (952300) 75' Black Low Loss Wilson400 Cable (952375)		2' Black Low Loss Wilson400 Cable (952302) 100' Black Low Loss Wilson400 Cables x1 (952300) 75' Black Low Loss Wilson400 Cable (952375)		2' Black Low Loss Wilson400 Cable (952302) 75' Black Low Loss Wilson400 Cable (952375) 100' Black Low Loss Wilson400 Cable (952300) x2

UPC



# Line Up Sheet

WilsonPro Commercial Boosters



**Pro 4000**  
460223



**Pro 4000R**  
460231



**Pro 1000**  
460236



**Pro 1000R**  
460237



**Pro 1050**  
460230

MOUNTING	Standard Mount	Rack Mount	Standard Mount	Rack Mount	Standard Mount										
EXTERNAL ANTENNA OPTIONS	Wide Band Directional Antenna (314411) 4G Omni Plus Building Antenna (304422) 4G Omni Building Antenna (304424)														
INTERNAL ANTENNA OPTIONS	4G Dome Antenna (304412)														
CABLE OPTIONS	75' Wilson400 Cable, 100' Wilson400 Cable (x4)		75' Wilson400 Cable, 100' Wilson400 Cable (x1)		75' Wilson400 Cable, 100' Wilson400 Cable (x2)										
FREQUENCIES MHZ	<table border="0"> <tr> <td>Band 12/17</td> <td>698-716</td> </tr> <tr> <td>Band 13</td> <td>746-787</td> </tr> <tr> <td>Band 5</td> <td>824-894</td> </tr> <tr> <td>Band 4</td> <td>1850-1990</td> </tr> <tr> <td>Band 25/2</td> <td>1710-1755/2110-2155</td> </tr> </table>					Band 12/17	698-716	Band 13	746-787	Band 5	824-894	Band 4	1850-1990	Band 25/2	1710-1755/2110-2155
Band 12/17	698-716														
Band 13	746-787														
Band 5	824-894														
Band 4	1850-1990														
Band 25/2	1710-1755/2110-2155														
BOOSTER DIMENSIONS	Length - 18 inches Width - 11.5 inches Height - 3.75 inches	Length - 19 inches Width - 12.5 inches Height - 1.75 inches	Length - 18 inches Width - 11.5 inches Height - 3.75 inches	Length - 19 inches Width - 12.5 inches Height - 1.75 inches	Length - 18 inches Width - 11.5 inches Height - 3.75 inches										
BOOSTER WEIGHT	15.405 lbs	5.45 lbs	15.405 lbs	5.45 lbs	44.82 lbs										

UPC



# Line Up Sheet

WilsonPro Commercial Boosters



**Pro 70  
(50 Ohm)**  
465134



**Pro 70  
(75 Ohm)**  
463134








**Pro 70 Plus  
(50 Ohm)**  
463127



**Pro 70 Plus  
(75 Ohm)**  
460127



**Pro 70 Plus Select  
(50 Ohm)**  
462127

MOUNTING	Standard Mount				
NUMBER OF INTERNAL ANTENNA PORTS	1 Port				
COMPATIBILITY	LTE / 4G / 3G				
MAX GAIN	70 dB				
EXTERNAL ANTENNA	Outside Directional Antenna (314411)				
INTERNAL ANTENNA	Inside Panel Antenna (311135)	Inside Panel Antenna (311155)	Inside Panel Antenna (311135)	Inside Panel Antenna (311155)	Inside Panel Antenna (311135)
IMPEDANCE	50 Ohm	75 Ohm	50 Ohm	75 Ohm	50 Ohm
POWER	12 V / 3 A				
CONNECTORS	N-Female	F-Female	N-Female	F-Female	N-Female
CABLE INCLUDED	2' Black Low Loss Wilson400 Cable (952302) 60' Black Low Loss Wilson400 Cables (952360) 75' Black Low Loss Wilson400 Cable (952375)	2' Black RG11 Cable (951127) 50' Black RG11 Cable (951150) 75' Black RG11 Cable (951175)	2' Black Low Loss Wilson400 Cable (952302) 60' Black Low Loss Wilson400 Cables (952360) 75' Black Low Loss Wilson400 Cable (952375)	2' Black RG11 Cable (951127) 50' Black RG11 Cable (951150) 75' Black RG11 Cable (951175)	2' Black Low Loss Wilson400 Cable (952302) 60' Black Low Loss Wilson400 Cables (952360) 75' Black Low Loss Wilson400 Cable (952375)
UPC	 8 11815 02589 4	 8 11815 02421 7	 8 11815 02599 3	 8 11815 02528 3	 8 11815 02581 8

# Line Up Sheet

WilsonPro Commercial Boosters



**Pro 70**  
(50 Ohm)  
465134



**Pro 70**  
(75 Ohm)  
463134



**Pro 70 Plus**  
(50 Ohm)  
463127



**Pro 70 Plus**  
(75 Ohm)  
460127



**Pro 70 Plus Select**  
(50 Ohm)  
462127

MOUNTING	Standard Mount				
EXTERNAL ANTENNA OPTIONS	Wide Band Directional Antenna (314411) 4G Omni Plus Building Antenna (304422) 4G Omni Building Antenna (304424)				
INTERNAL ANTENNA OPTIONS	4G Dome Antenna (304412) Panel Antenna (311135)				
CABLE OPTIONS	60' Wilson400 Cable, 100' Wilson400 Cable	RG11 Cable	75' Wilson400 Cable, 100' Wilson400 Cable	RG11 Cable	75' Wilson400 Cable, 60' Wilson400 Cable
FREQUENCIES MHZ	Band 12/17 698-716 Band 13 746-787 Band 5 824-894 Band 4 1850-1990 Band 25/2 1710-1755/2110-2155				
BOOSTER DIMENSIONS	Length - 8.875 inches Width - 6 inches Height - 1.5 inches				
BOOSTER WEIGHT	2.78 lbs				

UPC



# Pro 70 Plus Select (50 Ω)

SKU: 462127

## FEATURES

- +12 dBm downlink power for highest available indoor coverage
- Adjustable uplink and downlink gain controls
- Graphical uplink & downlink power meter
- Boosts cell phone signal inside a building or large area up to 25,000 sq. ft.
- Up to 70 dB gain



## Kit Includes



Pro 70 Plus Select (50Ω)



Wide Band Directional Antenna (314411)



Dual Band Panel Antenna (311135)



Lightning Surge Protector (859902)



2ft Low-Loss Wilson400 Cable (952302)



60ft Low-Loss Wilson400 Cable (952360)



75ft Low-Loss Wilson400 Cable (952375)



120v AC Power Supply (859900)

## About

Designed to provide enhanced indoor cellular coverage for all commercial space, including hospitals, hotels, warehouses and offices, the **Pro 70 Plus Select** passive distributed antenna system from Wilson Electronics amplifies weak cellular signals to provide reliable voice and data coverage – including 4G – to inside spaces where signals may not penetrate. Adjustable controls on each band make it easy to adjust the uplink and downlink gain, while the onboard software and microprocessor automatically prevents the booster from exceeding FCC limits.

The PRO 70 Plus Select also carries the same great features as the Pro 70 Plus, including maximum permitted downlink power, for maximum coverage, and built-in signal strength meter for easy tower location. Wilson Electronics quality and an industry-leading three year warranty make the Pro 70 Plus Select a clear choice for the professional technology integrator.

## Specifications

MODEL NUMBER	462127 • 462227 • 462327	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	12V/3A	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	8.875 x 6.0 x 1.5 in	
BOOSTER WEIGHT	2.78 lbs	

## Detailed Specifications

Pro 70 Plus Select						
Model Number	U462027					
FCC ID	PWO460027					
IC ID	4726A-460027					
Connectors	N-Female					
Antenna Impedance	50 Ohms					
Frequency	698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz					
Passband Gain (nominal)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz	
	56.0	55.2	58.9	60.7	60.7	
20 dB Bandwidth (MHz)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz	
	Typical 29.9	28.6	38.7	82.6	81.8	
	Maximum 34.4	34.4	40.3	85.0	85.9	
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz	
	20.4	20.82	25.16	23.0	21.42	
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz	
	11.57	10.41	9.4	11.3	9.47	
Power output for multiple received channels (Uplink) dBm	No. Tones	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
		2	18.0	17.6	24.9	20.0
	3	14.5	14.0	21.4	16.4	15.1
	4	12.0	11.5	18.9	13.9	12.6
	5	10.0	9.6	16.9	12.0	10.7
	6	8.4	8.0	15.3	10.4	9.1
Power output for multiple received channels (Downlink) dBm	No. Tones	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
		2	9.50	7.60	10.00	11.70
	3	6.00	4.10	6.50	8.20	5.60
	4	3.50	1.60	4.00	5.70	3.10
	5	1.60	-0.40	2.00	3.80	1.10
	6	0.00	-1.90	0.40	2.20	-0.40
Noise Figure	5 dB nominal					
Isolation	> 90 dB					
Power Requirements	110-240 V AC, 50-60 Hz, 20 W					


Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Package Dimensions

13.5 L x 13 H x 19.5 W



MASTER CARTON: 28 L x 14 W x 20 H | 38 lbs.

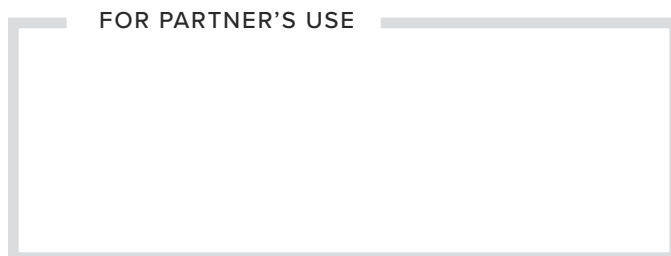

462127\_70PlusSelect\_SS\_Rev03\_092517

## Support

3 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660  
Monday to Saturday

## UPC



PRO 70 PLUS SELECT (50 OHM) DIRECTIONAL/DOME KIT



PRO 70 PLUS SELECT (50 OHM) OMNI/DOME KIT



## Additional Product Kits

### Pro 70 Plus Select (50 OHM) Directional/Dome Kit 462227

- 1 Pro 70 Plus Select (50 OHM)
- 1 Wide Band Directional Antenna
- 1 4G Dome Ceiling Antenna
- 1 Lightning Surge Protector
- 1 2ft Low-Loss Wilson400 Cable
- 1 60ft Low-Loss Wilson400 Cable
- 1 75ft Low-Loss Wilson400 Cable
- 1 120v AC Power Supply

### Pro 70 Plus Select (50 OHM) Omni/Dome Kit 462327

- 1 Pro 70 Plus Select (50 OHM)
- 1 4G Omni Building Antenna
- 1 4G Dome Ceiling Antenna
- 1 Lightning Surge Protector
- 1 2ft Low-Loss Wilson400 Cable
- 1 60ft Low-Loss Wilson400 Cable
- 1 75ft Low-Loss Wilson400 Cable
- 1 120v AC Power Supply

## Antenna Expansion Kits

### Single Antenna Expansion Kit

#### 309906-50N

- 1 Wall Mount Panel Antenna
- 1 50 Ohm 2-Way Splitter
- 1 2ft. Wilson400 Cable
- 1 60ft. Wilson400 Cable

### Double Antenna Expansion Kit

#### 309907-50N

- 2 Wall Mount Panel Antenna
- 1 50 Ohm 3-Way Splitter
- 1 2ft. Wilson400 Cable
- 2 60ft. Wilson400 Cable

### Triple Antenna Expansion Kit

#### 309908-50N

- 3 Wall Mount Panel Antenna
- 1 50 Ohm 4-Way Splitter
- 1 2ft. Wilson400 Cable
- 3 60ft. Wilson400 Cable



# Pro 4000

SKU: 460223

## FEATURES

- Incorporates four independently controlled indoor antennas
- XDR technology: never shuts down, even with very strong outside cellular signals
- +12 dBm downlink power, per port, for highest available indoor coverage
- Self-optimizing design minimizes installation time
- Up to 100,000 sq. ft. coverage
- Full color display, indicating gain and power levels of each band, for easy antenna setup
- Compatible with all North American cellular networks



## RACK MOUNT OPTION:



Pro 4000R

SKU: 460231

## Kit Includes



4000 Booster



Outside Directional Antenna (314411)



Inside Dome Antenna x4 (304412)



Lightning Surge Protector (859902)



2ft Low-Loss Wilson400 Cable (952302)



75ft Low-Loss Wilson400 Cable (952375)



100ft Low-Loss Wilson400 Cable x4 (952300)

## About

The WilsonPro 4000 passive distributed antenna system is a wall (or RACK with 460231) mounted, multi-amplifier cell booster to incorporate four separate signal amplifiers feeding multiple indoor antennas.

Designed to provide enhanced in-building cellular coverage for all commercial spaces, including hospitals, hotels, warehouses and offices, the WilsonPro 4000 amplifies weak cell signals to provide reliable voice and data coverage—including 4G – to inside spaces where signals may not penetrate. With new eXtended Dynamic Range (XDR) technology, the amplifier never shuts off due to a strong outside signal or changes in outside signal strength.

Like all WilsonPro cellular signal boosters, the WilsonPro 4000 features cell site protections that auto-detect and prevent any cell tower interference.

## Specifications

MODEL NUMBER	460223 • 460231	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	110 - 240 V AC, 50 - 60 Hz, 30 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	3.75 x 11.5 x 18 in • 1.75 x 19 x 12.5	
BOOSTER WEIGHT	15.405 lbs • 5.45 lbs	

## Detailed Specifications

	4000		4000R		
<b>Model Number</b>	460023		460231		
<b>FCC ID</b>	PWO460023		PWO460231		
<b>IC ID</b>	4726A-460023		4726A-460231		
<b>Connectors</b>	N-Female				
<b>Antenna Impedance</b>	50 Ohms\				
<b>Frequency</b>	698-716 MHz, 729-746 MHz, 746-756 MHz, 746-787 MHz, 824-894 MHz, 1850-1990 MHz, 1710-1755/2110-2155 MHz				
<b>Passband Gain (nominal)</b>	<b>700MHz Band12/17</b> 57.8	<b>700MHz Band13</b> 57.8	<b>800MHz</b> 59.8	<b>1700/2100MHz</b> 62.5	<b>1900MHz</b> 63.6
<b>20 dB Bandwidth (MHz)</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700/2100MHz</b>	<b>1900MHz</b>
Typical	29.8	29.9	36.4	76.7	73.8
Maximum	35.2	35.2	37.4	79.2	74.4
<b>Power output for single cell phone (Uplink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>
	25.4	25.5	24.8	25.8	25.2
<b>Power output for single cell phone (Downlink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>2100MHz</b>	<b>1900MHz</b>
	11.1	11.1	10.6	10.7	8.7
<b>Power output for multiple received channels (Uplink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>
<b>No. Tones</b>					
2	18.0	18.3	21.1	17.6	22.1
3	14.5	14.8	17.6	14.1	18.6
4	12.0	12.3	15.1	11.6	16.1
5	10.0	10.3	13.1	9.6	14.1
6	8.5	8.8	11.6	8.1	12.6
<b>Power output for multiple received channels (Downlink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>2100MHz</b>	<b>1900MHz</b>
<b>No. Tones</b>					
2	11.2	12.5	14.0	11.4	10.5
3	7.7	9.0	10.5	7.9	7.0
4	5.2	6.5	8.0	5.4	4.5
5	3.2	4.5	6.0	3.4	2.5
6	1.7	3.0	4.5	1.9	1.0
<b>Noise Figure</b>	5 dB nominal				
<b>Isolation</b>	> 90 dB				
<b>Power Requirements</b>	12V 3A				


The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.


The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.

## Package Dimensions


460231 / 460223 - 19.5 L x 19.5 H x 28 W



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: TBD

FOR PARTNER'S USE

## Support



3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660  
Monday to Saturday

## UPC



460223-460231\_WilsonPro4000/4000R\_SS\_Rev03\_092517

# Pro 70 (50 Ω)

SKU: 465134

## FEATURES

- Cell phone signal boost coverage up to 20,000 sq. ft
- Cell site protections that prevent interference with the carriers' system
- Self-optimizing design minimizes installation time
- Expansion kits available for large scale installations
- 5-Band All Carrier Cell Phone Signal Booster
- Digital Display to view Automatic Gain Control



## Kit Includes



Pro 70 (50 Ohm)



Outside Directional Antenna (314411)



Inside Panel Antenna (311135)



Lightning Surge Protector (859902)



2ft Low-Loss Wilson400 Cable (952302)



60ft Low-Loss Wilson400 Cable (952360)



75ft Low-Loss Wilson400 Cable (952375)



Power Supply (859900)

## About

The **Pro 70** passive distributed antenna system from Wilson Electronics amplifies weak cellular signals to provide reliable voice and data coverage - including 4G - inside homes and other buildings where signals may not penetrate.

Like all Wilson boosters, the Pro 70 features cell site protections that prevent any possibility of interference with cell towers. The Pro 70, and all WilsonPro models, are sold only through trained, certified custom technology integrators and are not available via any online or retail source. Wilson Electronics quality and our industry-leading three year warranty make the Pro 70 the clear choice for the professional technology integrator.

## Specifications

MODEL NUMBER	465134	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	12V/3A	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	1.5 x 6 x 8.75 in	
BOOSTER WEIGHT	2.78 lbs	

## Detailed Specifications

Pro 70™- 50 Ohm						
Model Number	465034					
FCC ID	PWO460027					
IC ID	4726A-460027					
Connectors	N-Female					
Antenna Impedance	50 Ohm					
Frequency	698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz					
Passband Gain (nominal)	700MHz Band12/17 56.0	700MHz Band13 55.2	800MHz 58.9	1700/ 2100MHz 60.7	1900MHz 60.7	
20 dB Bandwidth (MHz)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz	
Typical	29.9	28.6	38.7	82.6	81.8	
Maximum	34.4	34.4	40.3	85.0	85.9	
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz	
	20.4	20.82	25.16	23.0	21.42	
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz	
	-0.40	-2.10	-2.00	0.90	-1.40	
Power output for multiple received channels (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz	
No. Tones						
2	18.0	17.6	24.9	20.0	18.6	
3	14.5	14.0	21.4	16.4	15.1	
4	12.0	11.5	18.9	13.9	12.6	
5	10.0	9.6	16.9	12.0	10.7	
6	8.4	8.0	15.3	10.4	9.1	
Power output for multiple received channels (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz	
No. Tones						
2	0.20	-2.20	-0.80	0.70	2.10	
3	-3.30	-5.70	-4.30	-2.80	-1.40	
4	-5.80	-8.20	-6.80	-5.30	-3.90	
5	-7.70	-10.10	-8.70	-7.20	-5.80	
6	-9.30	-11.70	-10.30	-8.80	-7.40	
Noise Figure	5 dB nominal					
Isolation	> 90 dB					
Power Requirements	110-240 V AC, 50-60 Hz, 20 W					

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Additional Product Kits

Antenna Expansion Kits

### Single Antenna Expansion Kit

**309906-50N**

- 1 Wall Mount Panel Antenna
- 1 50 Ohm 2-Way Splitter
- 1 2ft. Wilson400 Cable
- 1 60ft. Wilson400 Cable

### Double Antenna Expansion Kit

**309907-50N**

- 2 Wall Mount Panel Antenna
- 1 50 Ohm 3-Way Splitter
- 1 2ft. Wilson400 Cable
- 2 60ft. Wilson400 Cable


### Triple Antenna Expansion Kit

**309908-50N**

- 3 Wall Mount Panel Antenna
- 1 50 Ohm 4-Way Splitter
- 1 2ft. Wilson400 Cable
- 3 60ft. Wilson400 Cable

## Package Dimensions

13 L x 19.5 W x 13.5 H

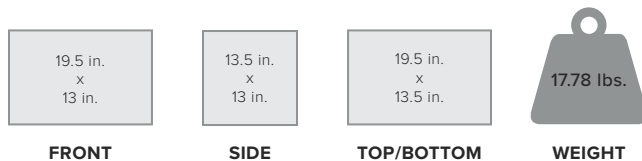

MASTER CARTON: 28 L x 14 W x 20 H | 38 lbs.

FOR PARTNER'S USE



465134\_Pro70-50Ohm\_SS\_Rev03\_092517

## Support



3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660

Monday to Saturday

## UPC



# Pro 70 (75 Ω)

SKU: 463134

## FEATURES

- Cell phone signal boost coverage up to 20,000 sq. ft
- Cell site protections that prevent interference with the carriers' system
- Self-optimizing design minimizes installation time
- Expansion kits available for large scale installations
- 5-Band All Carrier Cell Phone Signal Booster
- Digital Display to view Automatic Gain Control



## Kit Includes



Pro 70 (75 Ohm)



Outside Directional Antenna (314475)



Inside Panel Antenna (311155)



Lightning Surge Protector (859992)



2ft Black RG11 Cable (951127)



50ft Black RG11 Cable (951150)



75ft Black RG11 Cable (951175)



Power Supply (859900)

## About

The **Pro 70** passive distributed antenna system from Wilson Electronics amplifies weak cellular signals to provide reliable voice and data coverage - including 4G - inside homes and other buildings where signals may not penetrate.

Like all Wilson boosters, the Pro 70 features cell site protections that prevent any possibility of interference with cell towers. The Pro 70, and all WilsonPro models, are sold only through trained, certified custom technology integrators and are not available via any online or retail source. Wilson Electronics quality and our industry-leading three year warranty make the Pro 70 the clear choice for the professional technology integrator.

## Specifications

MODEL NUMBER	463134	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	75 Ohm	
POWER	12V/3A	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	1.5 x 6 x 8.5 in	
BOOSTER WEIGHT	2.78 lbs	

## Detailed Specifications

Pro 70™						
<b>Model Number</b>	463034					
<b>FCC ID</b>	PWO460027					
<b>IC ID</b>	4726A-460027					
<b>Connectors</b>	F-Female					
<b>Antenna Impedance</b>	75 Ohms					
<b>Frequency</b>	698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz					
<b>Passband Gain (nominal)</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700/ 2100MHz</b>	<b>1900MHz</b>	
	56.0	55.2	58.9	60.7	60.7	
<b>20 dB Bandwidth (MHz)</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700/2100MHz</b>	<b>1900MHz</b>	
Typical	29.9	28.6	38.7	82.6	81.8	
Maximum	34.4	34.4	40.3	85.0	85.9	
<b>Power output for single cell phone (Uplink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>	
	20.4	20.82	25.16	23.0	21.42	
<b>Power output for single cell phone (Downlink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>	
	-0.40	-2.10	-2.00	0.90	-1.40	
<b>Power output for multiple received channels (Uplink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>	
<b>No. Tones</b>						
2	18.0	17.6	24.9	20.0	18.6	
3	14.5	14.0	21.4	16.4	15.1	
4	12.0	11.5	18.9	13.9	12.6	
5	10.0	9.6	16.9	12.0	10.7	
6	8.4	8.0	15.3	10.4	9.1	
<b>Power output for multiple received channels (Downlink) dBm</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>2100MHz</b>	<b>1900MHz</b>	
<b>No. Tones</b>						
2	0.20	-2.20	-0.80	0.70	2.10	
3	-3.30	-5.70	-4.30	-2.80	-1.40	
4	-5.80	-8.20	-6.80	-5.30	-3.90	
5	-7.70	-10.10	-8.70	-7.20	-5.80	
6	-9.30	-11.70	-10.30	-8.80	-7.40	
<b>Noise Figure</b>	5 dB nominal					
<b>Isolation</b>	> 90 dB					
<b>Power Requirements</b>	110-240 V AC, 50-60 Hz, 20 W					

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Additional Product Kits

### Single Antenna Expansion Kit

#### 309909-75F

- 1 Wall Mount Panel Antenna
- 1 75 Ohm 2-Way Splitter
- 1 2ft. RG11 Cable
- 1 50ft. RG11 Cable

### Double Antenna Expansion Kit

#### 309910-75F

- 2 Wall Mount Panel Antenna
- 1 75 Ohm 3-Way Splitter
- 1 2ft. RG11 Cable
- 2 50ft. RG11 Cable

### Triple Antenna Expansion Kit

#### 309911-75F


- 3 Wall Mount Panel Antenna
- 1 75 Ohm 4-Way Splitter
- 1 2ft. RG11 Cable
- 3 50ft. RG11 Cable

## Package Dimensions

13 L x 19.5 W x 13.5 H



**MASTER CARTON:** 28 L x 14 W x 20 H | 35 lbs.

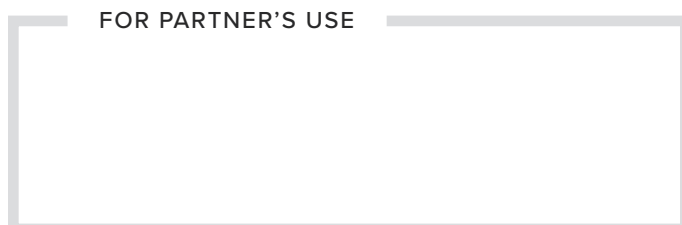

## Support



3 Year Warranty from Purchase.

**Website:** [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

**Phone:** +1 866 294 1660  
Monday to Saturday

## UPC

PRO 70 (75 OHM)



463134\_Pro70-75Ohm\_SS\_Rev03\_092517

# Pro 70 Plus (50 Ω)

SKU: 463127

## FEATURES

- +12 dBm downlink power for highest available indoor coverage
- Features a self-optimizing microprocessor with a built-in graphical signal meter for easy tower location
- Boosts cell phone signal inside a building or large area up to 25,000 sq. ft.
- Cell site protections that prevent interference with the carriers' system
- Self-optimizing design minimizes installation time
- Expansion kits available for large scale installations
- 5-Band All Carrier Cell Phone Signal Booster
- Digital Display to view Automatic Gain Control



## Kit Includes



Pro 70 Plus  
(50 Ohm)



Outside  
Directional Antenna  
(314411)



Inside Panel  
Antenna  
(311135)



Lightning Surge  
Protector  
(859902)



2ft Low-Loss  
Wilson400 Cable  
(952302)



60ft Low-Loss  
Wilson400 Cable  
(952360)



75ft Low-Loss  
Wilson400 Cable  
(952375)



Power Supply  
(859900)

## About

The **Pro 70 Plus** passive distributed antenna system from Wilson Electronics amplifies weak cellular signals to provide reliable voice and data coverage - including 4G - inside homes and other buildings where signals may not penetrate. The Pro 70 Plus features a self-optimizing microprocessor with a built-in graphical signal meter. The uplink and downlink power display makes it easy for the integrator to determine the direction of the cell tower and the strength of the available signal, which greatly reduce installation time.

Like all Wilson boosters, the Pro 70 Plus features cell site protections that prevent any possibility of interference with cell towers. The Pro 70 Plus, and all WilsonPro models, are sold only through trained, certified custom technology integrators and are not available via any online or retail source. Wilson Electronics quality and our industry-leading three year warranty make the Pro 70 Plus the clear choice for the professional technology integrator.

## Specifications

MODEL NUMBER	463127 • 463227 • 463327	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	12V/3A	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	1.5 x 6 x 8.75 in	
BOOSTER WEIGHT	2.78 lbs	




## Detailed Specifications

Pro 70 Plus™ 50 Ohm					
Model Number	463027				
FCC ID	PWO460027				
IC ID	4726A-460027				
Connectors	N-Female				
Antenna Impedance	50 Ohms				
Frequency	698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Passband Gain (nominal)	700MHz Band12/17 56.0	700MHz Band13 55.2	800MHz 58.9	1700/2100MHz 60.7	1900MHz 60.7
20 dB Bandwidth (MHz)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz
Typical	29.9	28.6	38.7	82.6	81.8
Maximum	34.4	34.4	40.3	85.0	85.9
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	20.4	20.82	25.16	23.0	21.42
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	11.57	10.41	9.4	11.3	9.47
Power output for multiple received channels (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
No. Tones					
2	18.0	17.6	24.9	20.0	18.6
3	14.5	14.0	21.4	16.4	15.1
4	12.0	11.5	18.9	13.9	12.6
5	10.0	9.6	16.9	12.0	10.7
6	8.4	8.0	15.3	10.4	9.1
Power output for multiple received channels (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
No. Tones					
2	9.50	7.60	10.00	11.70	9.10
3	6.00	4.10	6.50	8.20	5.60
4	3.50	1.60	4.00	5.70	3.10
5	1.60	-0.40	2.00	3.80	1.10
6	0.00	-1.90	0.40	2.20	-0.40
Noise Figure	5 dB nominal				
Isolation	> 90 dB				
Power Requirements	110-240 V AC, 50-60 Hz, 20 W				

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Package Dimensions


13 L x 19.5 W x 13.5 H



FRONT



SIDE




TOP/BOTTOM



WEIGHT

MASTER CARTON: 28 L x 14 W x 20 H | 38 lbs.

FOR PARTNER'S USE

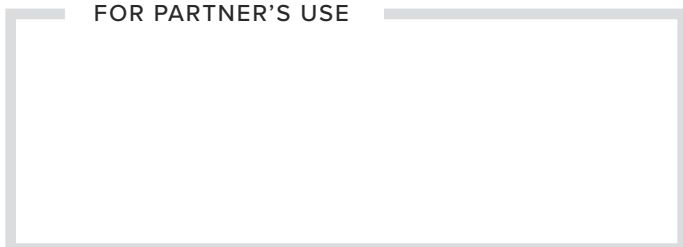

463127\_Pro70Plus-50Ohm\_SS\_Rev03\_092517

## Support



3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660

Monday to Saturday

UPC

PRO 70 PLUS (50 OHM)



8 11815 02599 3

PRO 70 PLUS (50 OHM)  
OMNI/DOME KIT



8 11815 02703 4

PRO 70 PLUS (50 OHM)  
DIRECTIONAL/DOME KIT



8 11815 02702 7

## Additional Product Kits

### Pro 70 Plus (50 OHM) Directional/Dome Kit 463227

- 1 Pro 70 Plus (50 OHM)
- 1 Wide Band Directional Antenna
- 1 4G Dome Ceiling Antenna
- 1 Lightning Surge Protector
- 1 2ft Low-Loss Wilson400 Cable
- 1 60ft Low-Loss Wilson400 Cable
- 1 75ft Low-Loss Wilson400 Cable
- 1 120v AC Power Supply

### Pro 70 Plus (50 OHM) Omni/Dome Kit 463327

- 1 Pro 70 Plus (50 OHM)
- 1 4G Omni Building Antenna
- 1 4G Dome Ceiling Antenna
- 1 Lightning Surge Protector
- 1 2ft Low-Loss Wilson400 Cable
- 1 60ft Low-Loss Wilson400 Cable
- 1 75ft Low-Loss Wilson400 Cable
- 1 120v AC Power Supply

## Antenna Expansion Kits

### Single Antenna Expansion Kit

309906-50N

- 1 Wall Mount Panel Antenna
- 1 50 Ohm 2-Way Splitter
- 1 2ft. Wilson400 Cable
- 1 60ft. Wilson400 Cable

### Double Antenna Expansion Kit

309907-50N

- 2 Wall Mount Panel Antenna
- 1 50 Ohm 3-Way Splitter
- 1 2ft. Wilson400 Cable
- 2 60ft. Wilson400 Cable

### Triple Antenna Expansion Kit

309908-50N

- 3 Wall Mount Panel Antenna
- 1 50 Ohm 4-Way Splitter
- 1 2ft. Wilson400 Cable
- 3 60ft. Wilson400 Cable



# Pro 70 Plus (75 Ω)

**SKU:** 460127

## FEATURES

- +12 dBm downlink power for highest available indoor coverage
- Features a self-optimizing microprocessor with a built-in graphical signal meter for easy tower location
- Boosts cell phone signal inside a building or large area up to 25,000 sq. ft.
- Cell site protections that prevent interference with the carriers' system
- Self-optimizing design minimizes installation time
- Expansion kits available for large scale installations
- 5-Band All Carrier Cell Phone Signal Booster
- Digital Display to view Automatic Gain Control



## Kit Includes



Pro 70 Plus  
(75 Ohm)



Outside  
Directional Antenna  
(314475)



Inside Panel  
Antenna  
(311155)



Lightning Surge  
Protector  
(859992)



2ft Black RG11  
Cable  
(951127)



50ft Black RG11  
Cable  
(951150)



75ft Black RG11  
Cable  
(951175)



Power Supply  
(859900)

## About

The **Pro 70 Plus** passive distributed antenna system from Wilson Electronics amplifies weak cellular signals to provide reliable voice and data coverage - including 4G - inside homes and other buildings where signals may not penetrate. The Pro 70 Plus features a self-optimizing microprocessor with a built-in graphical signal meter. The uplink and downlink power display makes it easy for the integrator to determine the direction of the cell tower and the strength of the available signal, which greatly reduce installation time.

Like all Wilson boosters, the Pro 70 Plus features cell site protections that prevent any possibility of interference with cell towers. The Pro 70 Plus, and all WilsonPro models, are sold only through trained, certified custom technology integrators and are not available via any online or retail source. Wilson Electronics quality and our industry-leading three year warranty make the Pro 70 Plus the clear choice for the professional technology integrator.

## Specifications

<b>MODEL NUMBER</b>	460127 • 460227	
<b>FREQUENCIES</b>	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
<b>MAX GAIN</b>	70 dB	
<b>IMPEDANCE</b>	75 Ohm	
<b>POWER</b>	12V/3A	
<b>CONNECTORS</b>	F-Female	
<b>BOOSTER DIMENSIONS</b>	1.5 x 6 x 8.5 in	
<b>BOOSTER WEIGHT</b>	2.78 lbs	


## Detailed Specifications

		Pro 70 Plus*				
<b>Model Number</b>		460027				
<b>FCC ID</b>		PWO460027				
<b>IC ID</b>		4726A-460027				
<b>Connectors</b>		F-Female				
<b>Antenna Impedance</b>		75 Ohms				
<b>Frequency</b>		698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
<b>Passband Gain (nominal)</b>		<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700/2100MHz</b>	<b>1900MHz</b>
		56.0	55.2	58.9	60.7	60.7
<b>20 dB Bandwidth (MHz)</b>		<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700/2100MHz</b>	<b>1900MHz</b>
Typical		29.9	28.6	38.7	82.6	81.8
Maximum		34.4	34.4	40.3	85.0	85.9
<b>Power output for single cell phone (Uplink) dBm</b>		<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>
		20.4	20.82	25.16	23.0	21.42
<b>Power output for single cell phone (Downlink) dBm</b>		<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>2100MHz</b>	<b>1900MHz</b>
		11.57	10.41	9.4	11.3	9.47
<b>Power output for multiple received channels (Uplink) dBm</b>	<b>No. Tones</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>1700MHz</b>	<b>1900MHz</b>
	<b>2</b>	18.0	17.6	24.9	20.0	18.6
	<b>3</b>	14.5	14.0	21.4	16.4	15.1
	<b>4</b>	12.0	11.5	18.9	13.9	12.6
	<b>5</b>	10.0	9.6	16.9	12.0	10.7
	<b>6</b>	8.4	8.0	15.3	10.4	9.1
<b>Power output for multiple received channels (Downlink) dBm</b>	<b>No. Tones</b>	<b>700MHz Band12/17</b>	<b>700MHz Band13</b>	<b>800MHz</b>	<b>2100MHz</b>	<b>1900MHz</b>
	<b>2</b>	9.50	7.60	10.00	11.70	9.10
	<b>3</b>	6.00	4.10	6.50	8.20	5.60
	<b>4</b>	3.50	1.60	4.00	5.70	3.10
	<b>5</b>	1.60	-0.40	2.00	3.80	1.10
	<b>6</b>	0.00	-1.90	0.40	2.20	-0.40
<b>Noise Figure</b>		5 dB nominal				
<b>Isolation</b>		> 90 dB				
<b>Power Requirements</b>		110-240 V AC, 50-60 Hz, 20 W				


Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Package Dimensions


19.25 L x 13 W x 13.25 H



FRONT



SIDE




TOP/BOTTOM



WEIGHT

**MASTER CARTON:** 28 L x 14 W x 20 H | 35 lbs.

FOR PARTNER'S USE

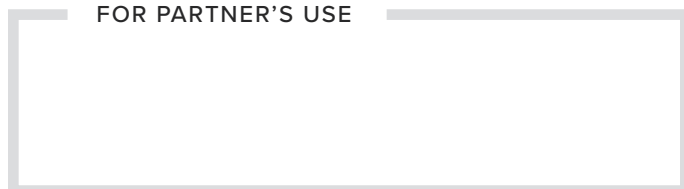

460127\_Pro70Plus-75Ohm\_SS\_Rev03\_092517

## Support



3 Year Warranty from Purchase.

**Website:** [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

**Phone:** +1 866 294 1660  
Monday to Saturday

## UPC

PRO 70 PLUS (75 OHM)



8 11815 02528 3

PRO 70 PLUS (75 OHM) DIRECTIONAL/DOME KIT



8 11815 02795 9

## Additional Product Kits

### Pro 70 Plus (75 OHM) Directional/Dome Kit 460227

- 1 Pro 70 Plus (75 OHM)
- 1 Wide Band Directional Antenna
- 1 4G Dome Ceiling Antenna
- 1 Lightning Surge Protector
- 1 2ft Black RG11 Cable
- 1 50ft Black RG11 Cable
- 1 75ft Black RG11 Cable
- 1 120v AC Power Supply

## Antenna Expansion Kits

### Single Antenna Expansion Kit 309909-75F

- 1 Wall Mount Panel Antenna
- 1 75 Ohm 2-Way Splitter
- 1 2ft. RG11 Cable
- 1 50ft. RG11 Cable

### Double Antenna Expansion Kit 309910-75F

- 2 Wall Mount Panel Antenna
- 1 75 Ohm 3-Way Splitter
- 1 2ft. RG11 Cable
- 2 50ft. RG11 Cable

### Triple Antenna Expansion Kit 309911-75F

- 3 Wall Mount Panel Antenna
- 1 75 Ohm 4-Way Splitter
- 1 2ft. RG11 Cable
- 3 50ft. RG11 Cable

# Pro 1000R

SKU: 460237

## FEATURES

- Industry-best +15 dBm maximum downlink power
- XDR technology: never shuts down, even with very strong outside cellular signals
- Full color display, indicating gain and power levels of each band, for easy antenna setup
- Compatible with all North America cell networks
- Integrated power supply



## WALL MOUNT OPTION:



**Pro 1000**  
SKU: 460236

## Kit Includes



1000R Booster



Outside Directional Antenna (314411)



Inside Dome Antenna x1 (304412)



Lightning Surge Protector (859902)



2ft Low-Loss Wilson400 Cable (952302)



75ft Low-Loss Wilson400 Cable (952375)



100ft Low-Loss Wilson400 Cable (952300)

## About

The **WilsonPro 1000R** passive distributed antenna system is the first rack mounted, cellular amplifier designed to provide enhanced in-building cellular coverage for all commercial spaces, including large homes, hospitals, hotels, warehouses and offices.

The WilsonPro 1000R amplifies weak cellular signals to provide reliable voice and data coverage—including 4G – to inside spaces where signals may not penetrate and With new eXtended Dynamic Range (XDR) technology, the amplifier never shuts off due to a strong outside signal or changes in outside signals.

Like all WilsonPro cellular signal boosters, the WilsonPro 1000R features cell site protections that auto-detect and prevent any cell tower interference.

## Specifications

<b>MODEL NUMBER</b>	460237 • 460236	
<b>FREQUENCIES</b>	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
<b>MAX GAIN</b>	70 dB	
<b>IMPEDANCE</b>	50 Ohm	
<b>POWER</b>	110 - 240 V AC, 50 - 60 Hz, 30 W	
<b>CONNECTORS</b>	N-Female	
<b>BOOSTER DIMENSIONS</b>	1.75 x 19 x 12.5 • 3.75 x 11.5 x 18 in	
<b>BOOSTER WEIGHT</b>	5.45 lbs • 15.405 lbs	

## Detailed Specifications

	1000R			1000	
Model Number	460237			460236	
FCC ID	PWO460037			PWO460036	
Connectors	N-Female				
Antenna Impedance	50 Ohms				
Frequency	698-716 MHz, 729-746 MHz, 746-756 MHz, 777-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Passband Gain (nominal)	700MHz Band12/17 57.6	700MHz Band13 58.0	800MHz 59.2	1700/2100MHz 65.7	1900MHz 65.2
20 dB Bandwidth (MHz)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz
Typical	29.6	30.3	36.8	77.5	74.5
Maximum	35.4	35.4	37.8	81.0	75.1
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	25.3	25.8	24.7	26.2	25.3
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	15.2	13.9	15.4	15.4	15.4
Power output for multiple received channels (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
No. Tones					
2	23.0	23.9	20.4	22.4	22.1
3	19.5	20.4	16.9	18.9	18.6
4	17.0	17.9	14.4	16.4	16.1
5	15.0	15.9	12.4	14.4	14.1
6	13.5	14.4	10.9	12.9	12.6
Power output for multiple received channels (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
No. Tones					
2	16.1	15.2	15.3	12.0	15.3
3	12.6	11.7	11.8	8.5	11.8
4	10.1	9.2	9.3	6.0	9.3
5	8.1	7.2	7.3	4.0	7.3
6	6.6	5.7	5.8	2.5	5.8
Noise Figure	5 dB nominal				
Isolation	> 90 dB				
Power Requirements	12V 3A				


The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.


The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.

## Package Dimensions


19.5 L x 19.5 H x 28 W



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: None


## Support

3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660

Monday to Saturday

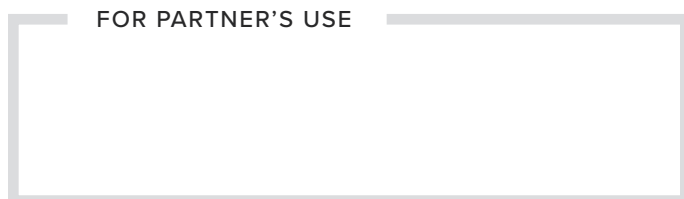

## UPC



460237-460236\_1000R+1000\_SS\_Rev03\_092517

# Pro 1050

SKU: 460230

## FEATURES

- Industry's first FCC & carrier approved "inline" cellular booster system
- Consists of "main" booster and "inline" booster
- "Inline" booster installed deep inside building and compensates for signal loss in long cable runs to inside antennas
- XDR technology: never shuts down due to overload, even with very strong outside cellular signals
- Automatically compensates for signal loss in up to 300' of cable
- Compatible with all North America cellular networks
- Three year warranty
- Up to +15 dBm downlink power at indoor antenna port, for maximum indoor coverage area



## INLINE BOOSTER:



## Kit Includes



WilsonPro 1050 Two-Part Booster System



Wide Band Directional Antenna + 75' Wilson 400 Cable



Dome Antenna + 100' Wilson 400 Cable



Lightning Surge Protector



100' Wilson 400 Cable



2' Wilson 400 Cable

## About

The **WilsonPro 1050** passive distributed antenna system is the first FCC and carrier-approved "in-line" booster solution, providing reliable cell coverage deep inside hard-to-reach areas of buildings, such as equipment rooms, and lower floors of high-rise buildings. The system consists of two units: a main amplifier and an inline amplifier, located up to 300' from the main booster. The inline booster compensates for signal loss up to 300' of Wilson400 cable.

The WilsonPro 1050 system amplifies weak cell signals to provide reliable voice and data coverage—including 4G to inside spaces where signals may not penetrate. With new eXtended Dynamic Range (XDR) technology, the amplifier never shuts off due to a strong outside signal or changes in outside signals.

Like all WilsonPro cellular signal boosters, the WilsonPro 1050 features cell site protections that auto-detect and prevent any cell tower interference.

## Specifications

MODEL NUMBER	460230	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	110 - 240 V AC, 50 - 60 Hz, 30 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	3.75 x 11.5 x 18 in	
BOOSTER WEIGHT	TBD lbs	


## Detailed Specifications

Pro 1050					
Model Number	460030				
FCC ID	PWO460030 / PWO0460030IL				
IC ID	4726A-460030				
Connectors	N-Female				
Antenna Impedance	50 Ohms				
Frequency	698-716 MHz, 729-746 MHz, 746-756 MHz, 777-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	24.7	24.7	24.4	25.1	24.5
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	14.8	14.3	15.6	15	15.1
Noise Figure	1050 Main		1050 In-Line		
	5 dB nominal		5 dB nominal		
Isolation	> 90 dB		> 90 dB		
Power Requirements	110-220V AC		5V 3A		

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.


Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

## Install Diagram

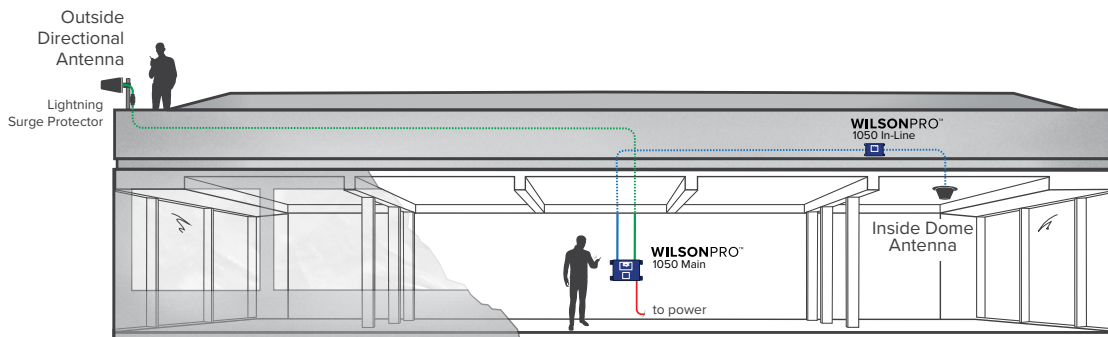

## Package Dimensions

19.5 L x 19.5 H x 28 W

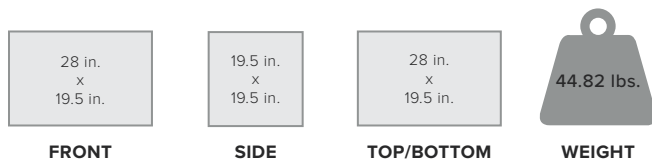

MASTER CARTON: None


## Support

3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660  
Monday to Saturday

UPC

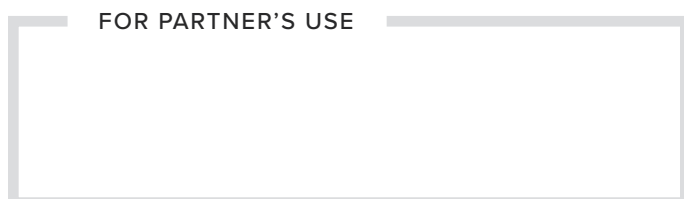

460230\_1050\_SS\_Rev03\_090517

# Signal 4G

SKU: 460119

## FEATURES

- Direct connect amplifier - connects directly to data modem
- Improves transmissions speeds while reducing resending of data
- Configurable to fit virtually any M2M (machine to machine) install
- Boosts 4G, 3G, and 2G for all carriers
- Bi-directional amplified signals to and from the cell tower
- Auto-power control ensures maximum output
- **Now with passive RF bypass failover.** If the Signal 4G loses power, the amplifier is “bypassed” so that the external antenna maintains connection to the modem.



NOW WITH PASSIVE RF BYPASS

## Kit Includes



Pro Signal 4G



Mini-Magnet Antenna (301126)



3' RG174 Cable (951151)



Power Supply (850003)

## About

Developed specifically for M2M installations, the WilsonPro Signal 4G direct-connect amplifier system is based on the same time-tested, market-proven technologies powering our entire line of commercial cellular signal boosters. The Signal 4G is ready to integrate with cellular modems, providing reliable signal that ensures successful data transfer. This booster kit works with all North American wireless service provider networks. The Signal 4G’s compact form factor makes it an ideal component for installations in weak signal environments. The Signal 4G kit includes the Wilson 4-inch mini magnet cellular antenna for maximum system gain to overcome weak signals. The Signal 4G is FCC and IC certified. The Signal 4G allows OEMs to source a compact, powerful and highly compatible signal booster that is ready to deploy. Integrators can more easily custom design M2M communication systems that fit in tightly constrained spaces. In locations where cellular signals are weak due to distance from the cell site, terrain features, or building materials like concrete and steel, the Signal 4G provides a strong, reliable signal.

## Specifications

MODEL NUMBER	460119 • 460219 • 461119	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	15 dB	
IMPEDANCE	50 Ohm	
POWER	5V/4A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	1.25 x 3.5 x 6.25 in	
BOOSTER WEIGHT	1.085 lbs	



## Detailed Specifications

Signal 4G					
Model Number	460019				
FCC ID	PWO460019				
Connectors	SMA				
Antenna Impedance	50 Ohms				
Frequency	698-716 MHz, 746-787 MHz, 824-894 MHz, 1850-1995 MHz, 1710-1755/2110-2155 MHz				
Passband Gain (typical)	700MHz Band12/17 11.8	700MHz Band13 11.0	800MHz 10.0	1700/2100MHz 7.1	1900MHz 8.6
20 dB Bandwidth (MHz)	700MHz Band12/17	700MHz Band13	800MHz	1700/2100MHz	1900MHz
Typical	29.5	31.6	38.4	81.8	75.4
Maximum	33.9	33.9	40.6	85.4	77.4
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
	24.7	24.9	24.1	25.6	25.0
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
	-6.3	-6.5	-6.5	-7.7	-5.8
Power output for multiple received channels (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz
No. Tones					
2	26.1	25.8	21.0	21.3	21.9
3	22.6	22.3	17.5	17.8	18.4
4	20.1	19.8	15.0	15.3	15.9
5	18.1	17.8	13.0	13.4	13.9
6	16.5	16.3	11.5	11.8	12.3
Power output for multiple received channels (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz
No. Tones					
2	-6.0	-5.9	-5.7	-6.8	-6.0
3	-9.5	-9.4	-9.2	-10.3	-9.5
4	-12.0	-11.9	-11.7	-12.8	-12.0
5	-14.0	-13.9	-13.7	-14.7	-14.0
6	-15.5	-15.4	-15.2	-16.3	-15.5
Noise Figure	5 dB nominal				
Isolation	> 40 dB				
Power Requirements	5 V / 4 A				

## Additional Product Kits

### Signal 4G Hardwire Kit

#### 460219

- 1 Pro Signal 4G
- 1 DC Hardwire Power Supply 6V/2A (859923)
- 1 Mini-Magnet Antenna (301126)
- 1 3' RG174 Cable with SMA Male Connectors (951151)

### Signal 4G Security Kit


#### 461119

- 1 Pro Signal 4G
- 1 50 Ohm Omni Antenna (304422)
- 1 30' RG58 SMA Male - N Male (955833)
- 1 10" RG58 SMA Male - SMA Male (955834)
- 1 AC/DC Power Supply 5V/4A (850003)
- 1 SMA Female - MCX 12" Adapter (951153)/(951154)

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor. The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.

## Package Dimensions

10.5 L x 2 W x 5.25 H

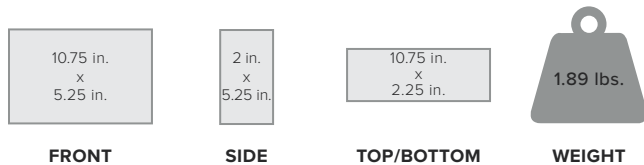

MASTER CARTON: TBD | 1.89 lbs.



460119\_Pro-Signal4G\_SS\_Rev03\_092517

## Support



3 Year Warranty from Purchase.

Website: [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

Phone: +1 866 294 1660

Monday to Saturday

## UPC



PRO SIGNAL 4G HARDWIRE KIT



PRO SIGNAL 4G SECURITY KIT





# Signal 3G

SKU: 460109

## FEATURES

- Direct connect amplifier - connects directly to data modem
- Improves transmissions speeds while reducing resending of data
- Configurable to fit virtually any M2M (machine to machine) installation
- Boosts 3G and 2G for all carriers
- Bi-directional amplified signals to and from the cell tower
- Auto-power control ensures maximum output



## Kit Includes



Pro Signal 3G



Outside 12" Magnet Antenna (311125)



3' RG174 Cable (951151)



Power Supply (859969)

## About

Developed specifically for M2M/IoT installations, the Wilson-Pro **Signal 3G** direct-connect amplifier system is based on the same field-tested, market-proven technology that powers all Wilson's cellular signal boosters. The Signal 3G is ready to integrate with cellular modems to provide reliable signal that ensures successful data transfer. This booster kit works with all U.S. and Canadian wireless service provider networks.

The Signal 3G's compact form factor makes it an ideal component for M2M/IoT installations in weak signal environments.

The Signal 3G is FCC certified to the latest technical standards for cellular signal boosters. The Signal 3G allows OEMs to source a compact, powerful and highly compatible signal booster that is ready to deploy. Integrators can more easily custom design M2M/IoT communication systems that fit tightly constrained spaces.

## Specifications

MODEL NUMBER	460109 • 460209 • 460309	
FREQUENCIES	Band 5	850 MHz
	Band 25/2	1900 MHz
MAX GAIN	15 dB	
IMPEDANCE	50 Ohm	
POWER	5V/ 2A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	.75 x 1.75 x 4 in	
BOOSTER WEIGHT	0.175 lbs	

## Detailed Specifications

		Signal 3G	
<b>Model Number</b>		460009	
<b>FCC Number</b>		PWO460009	
<b>IC Number</b>		PWO460009	
<b>Connectors</b>		SMA-Female	
<b>Antenna Impedance</b>		50 Ohms	
<b>Frequency</b>		824-894 MHz & 1850-1995 MHz	
<b>Passband Gain (nominal)</b>		<b>800 MHz</b>	<b>1900 MHz</b>
		13.4	12.3
<b>20 dB Bandwidth (MHz)</b>		<b>800 MHz</b>	<b>1900 MHz</b>
	Typical	41.7	84.1
	Maximum	43.3	88.9
<b>Power output for single cell phone (dBm)</b>		<b>800 MHz</b>	<b>1900 MHz</b>
	Uplink	23.8	22.3
	Downlink	-6.05	-6.3
<b>Power output for multiple received channels (Uplink) dBm</b>		<b>800 MHz</b>	<b>1900 MHz</b>
	<b>No. Tones</b>		
	2	24.1	23.2
	3	20.5	19.6
	4	18.0	17.1
	5	16.1	15.2
	6	14.5	13.6
<b>Power output for multiple received channels (Downlink) dBm</b>		<b>800 MHz</b>	<b>1900 MHz</b>
	<b>No. Tones</b>		
	2	-3.2	-4.7
	3	-6.7	-8.2
	4	-9.2	-10.7
	5	-11.1	-12.7
	6	-12.7	-14.2
<b>Noise Figure (typical downlink/uplink)</b>		4 dB (nominal)	
<b>Isolation</b>		> 60 dB	
<b>Power Requirements</b>		5V DC, 1A	

## Additional Product Kits

### Pro Signal 3G Kit

#### 460209

- 1 Pro Signal 3G
- 1 Mini Magnet Mount Antenna (301126)
- 1 Power Supply (859969)
- 1 3' RG174 Cable (951151)

### Pro Signal 3G Kit

#### 460309

- 1 Pro Signal 3G
- 1 Mini Magnet Mount Antenna (301126)
- 1 DC Hardwire Power Supply 5V/1A (859989)
- 1 3' RG174 Cable (951151)

The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.


Each Signal Booster is individually tested and factory set to ensure FCC

compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.


The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

## Package Dimensions


10.5 L x 2 W x 5.25 H



FRONT



SIDE




TOP/BOTTOM



WEIGHT

MASTER CARTON: TBD

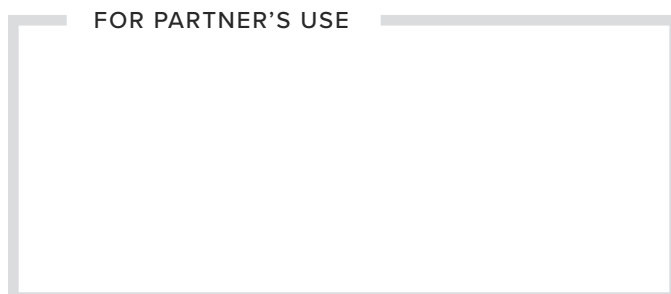

460109\_Pro-Signal3G\_SS\_Rev03\_092517

## Support



3 Year Warranty from Purchase.

**Website:** [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

**Phone:** +1 866 294 1660

Monday to Saturday

## UPC



# Pro Signal Meter

SKU: 460118

## FEATURES

- Works with 700, 800, 1900 and 2100 MHz spectrum bands
- Configurable with a variety of Wilson antennas
- Detects available signal indoors and outdoors
- Built in rechargeable battery
- 3 measurement modes: measures bands, channels, or frequencies

## Kit Includes



Signal Meter



Antenna for Indoor Frequency Mapping (311159)



DC Power Supply (859977)



AC Power Supply (859969)



## About

The new WilsonPro **Signal Meter** from Wilson Electronics features an integrated rechargeable battery allows for maximum portability while the large LCD display and push button operation takes the hassle out of site surveys.

## Specifications

MODEL NUMBER	460118 • 460218
IMPEDANCE	50 Ohm
POWER	5V DC, 1A
CONNECTORS	SMA Female
BOOSTER DIMENSIONS	1.25 x 3.25 x 6.75 in
BOOSTER WEIGHT	0.51 lbs

## Detailed Specifications

Pro Signal Meter	
<b>Model Number</b>	460018
Antenna connector	SMA
Antenna impedance	50 ohms
Dimensions	1.25" x 3.25" x 7"
Weight	9.7 oz
Maximum detectable in-band signal (dBm)	-38
Minimum detectable in-band signal with 1.5MHz BW (dBm)	-110
Minimum detectable in-band signal with 10MHz BW (dBm)	-105
Maximum recommended RF input (dBm)	-38
<b>Power Requirements</b>	5V / 1.5A

## Additional Accessories



Wide-Band Panel  
Antenna 700-2700MHz  
(314411)



Pole Mount  
Assembly  
(901117)



2' Extension Cable  
RG58  
(955802)

## Additional Product Kits




### Signal Meter Kit

**460218**


- 1 RF Signal Meter
- 1 3ft RG174 cable (SMA Male to SMA Male)
- 1 2ft RG58 cable (N Male to SMA Male)
- 1 5V/3A DC/DC Power Supply
- 1 5V/2A AC/DC Power Supply
- 1 N-Female to N-Female Barrel Connector
- 1 N-Male to F-Female Adapter

## Package Dimensions


10.75 L x 2.25 W x 5.25 H



FRONT



SIDE



TOP/BOTTOM



1.198 lbs.

WEIGHT

**MASTER CARTON:** 25 L x 18 W x 15 H | 35 lbs.

## Support




3 Year Warranty from Purchase.

**Website:** [www.wilsonpro.com/support](http://www.wilsonpro.com/support)

**Phone:** +1 866 294 1660

Monday to Saturday

FOR PARTNER'S USE

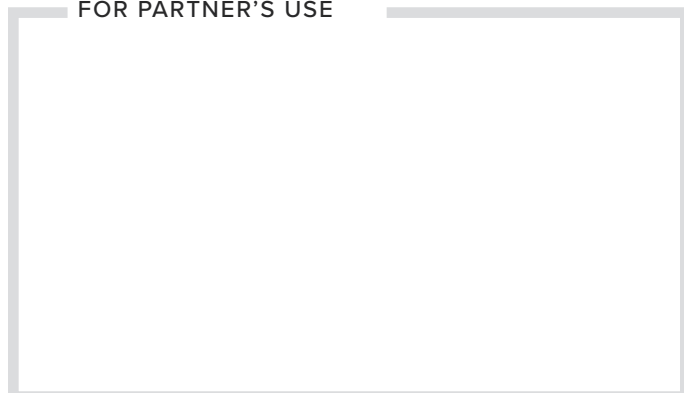

UPC

PRO SIGNAL METER



PRO SIGNAL METER KIT



460118\_Pro-SignalMeter\_SS\_Rev03\_092517

# Antennas (In-Depth)

# General Mobile External Antennas

## Stay connected on the road with weBoost mobile antennas

Designed for use with our mobile signal boosters, weBoost wide range of mobile antennas offers top performance and multiple mounting options. Our best-selling magnet-mount antennas install in seconds and are transferable between vehicles. For a more permanent installation, users can choose from glass- or NMO-mount options.

## Features



- Perfect for cars, vans and light trucks
- Mobile and indoor use



## SPECIFICATIONS


	Magnet-Mount Antennas	Mini Magnet-Mount Antennas
<b>PART NUMBER</b>	311125	301126
Frequency Range (MHz)	Refer to table on page 41	
Impedance	50 ohms	
Antenna Gain	Refer to table on page 41	
Signal Pattern	Omni	
Polarization	Vertical	
Ground Plane	Metal ground plane required	
Connector	SMA Male	SMA Male
Material	Whip - Stainless Steel	Whip - Plastic Coated Steel Wire
Coax Cable	RG174 - 12.5 feet	
Height	12.25 inches / 31.12 cm	4.175 inches / 10.60 cm
Mount	Rare earth magnet	Rare earth magnet

# Yagi Antennas - Durable, high-gain, directional antennas

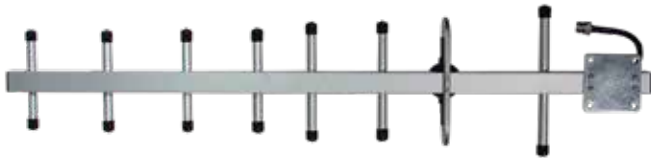

## 301111 Yagi 800 MHz

Our highest gain antenna for the 800 MHz band



## 314411 50 ohm

## 314475 75 ohm

Wide Band Directional Antenna


### SPECIFICATIONS

	Yagi		Log-Periodic	
<b>PART NUMBER</b>	301111		314411	314475
Number of Elements	8		9	
Frequency	Refer to table on page 41			
Impedance	50 ohms		75 ohms	
Antenna Gain	Refer to table on page 41			
Max Power	50 watts		100 watts	
Polarization	Directional			
	Vertical			
Connector	N-Female		F-Female	
Material	Aluminum			
Length	32.5 inches / 82.6 centimeters		11.42 inches / 29 centimeters	
Weight	2.9 ounces / 0.081 kg (with mount)		3.31 lbs / 1.5 Kg	
Mount	Mounts on pipe with 0.5 inch to 1.5 inch diameter			
Wind Surface Area	<100 cm <sup>2</sup>		<465 cm <sup>2</sup>	
Brackets	Max OD 2 inches			

# Building Antennas

## Features

- Built-in ground plane
- Mounting hardware included
- For fixed installations




### Signal Patterns

Panel Antennas when mounted vertically

H - Plane @ 806-894 MHz

H - Plane @ 1850-1990 MHz




### Signal Patterns

Omni-directional when mounted vertically

H - Plane @ 850 MHz

G - Plane @ 1920 MHz

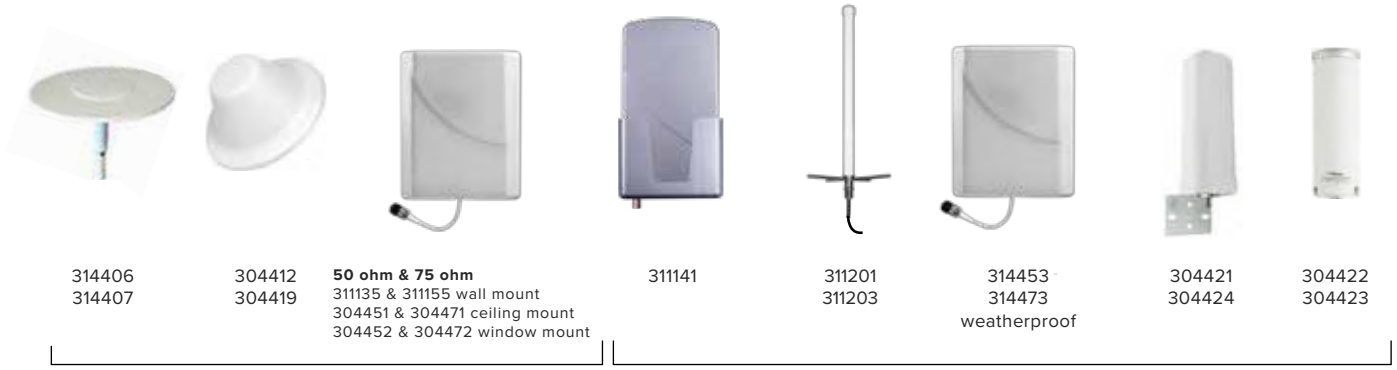

Inside Antennas

Outside Antennas

## SPECIFICATIONS

PART NUMBER	Low-Profile Dome		Dome		Panel						Omni							
	314406	314407	304412	304419	304451	304471	311135	311155	311141	304452	304472	311201	311203	304421	304424	304422	304423	
Frequency	Refer to table on page 41																	
Impedance	50 ohms	50 ohms	50 ohms	75 ohms	50 ohms	75 ohms	50 ohms	75 ohms	75 ohms	50 ohms	75 ohms	75 ohms	50 ohms	75 ohms	50 ohms	50 ohms	75 ohms	
Polarization	Vertical																	
Antenna Gain	Refer to table on page 41																	
Max Power	40 watts		50 watts				15 watts		50 watts		25 watts		100 watts					
Beamwidth Hor. Plane	360°		360°		70°/60°		100°		70°/60°		360°		360°					
Beamwidth Ver. Plane	25°/90°	100°/130°	60°		50°/45°		100°		50°/45°		60°		60°					
VSWR	2:1		1.5:1		1.5:1		2.0:1 (800) 1.8:1 (1900)		1.5:1		1.8:1		< 1.8		< 1.8		< 1.8	
Connector	N-Female		N-Female	F-Female	N-Female	F-Female	N-Female	F-Female	F-Female	N-Female	F-Female	F-Female	N-Female	F-Female	N-Female	N-Female	F-Female	
Dimensions inches/cm	16.2 x 6.36 / 41.15 x 16.15	9.4 x 6.36 / 23.88 x 16.15	7.3 x 3.3 / 185 x 85		8.27 x 7.09 x 1.73 / 21 x 18 x 4.39		7.75 x 4.38 x 2.63 / 19.7 x 11.1 x 6.7		18 / 45.72		2.6 x 7.5 / 66 x 19		2.6 x 7.50 / 66 x 19		2.5 x 9.8 / 63 x 250		2.5 x 9.8 / 63 x 250	
Ground Plane	N/A	N/A	Built-In Ground Plane				None Required		Built-In Ground Plane		Built-In Ground Plane		Built-In Ground Plane					
Front to Back Ratio	N/A		N/A				11/14 dB typical		N/A		N/A		N/A					



# Antenna Frequency Specific Gain Chart (dBi)

		FREQUENCY IN MHz					
		700-800	824-894	880-960	1710-1880	1850-1990	2110-2170
MAGNET MOUNT ANTENNAS	301103	1.9	5.1	3.1	-4.0	6.1	2.3
	311125	1.9	5.1	3.1	-4.0	6.1	2.3
	311128	1.9	5.1	3.1	-4.0	6.1	2.3
	311703	-1.9	4.8	4.6	0.3	4.1	0.6
MINI MAGNET MOUNT ANTENNAS	301113	1.7	2.1	0.5	2.2	3.1	1.4
	301126	1.7	2.1	0.5	2.2	3.1	1.4
4G OTR ANTENNAS	304414	3	3	3	3	3	3
	304415	3	3	3	3	3	3
GLASS MOUNT ANTENNAS	311102	1.8	3.5	2.8	-1.5	4.8	1.0
NMO ANTENNAS	311104	2.0	4.9	0.0	-3.1	5.9	1.3
	311112	2.4	5.5	-0.9	-1.2	5.5	1.7
	314203	3.7	4.4	4.3	-4.1	3.7	0.3
DUAL BAND LOW PROFILE ANTENNAS	301152	3.4	2.2	1.2	1.4	3.2	4.3
DESKTOP ANTENNA	301211	-0.8	1.5	1.2	2.4	3.4	1.2
YAGI ANTENNAS	301111	10.0	10.8	8.8	-16.4	-14.9	-13.8
	314411	7.3	8.1	7.4	9.2	10.6	10.4
	314475	7.3	8.1	7.4	9.2	10.6	10.4
4G LOW-PROFILE DOME ANTENNAS	314406	4	4	4	6	6	6
	314407	4	4	4	6	6	6
4G DOME ANTENNAS	304412	2.0	2.0	2.0	4.0	4.0	4.0
	304419	2.0	2.0	2.0	4.0	4.0	4.0
MARINE ANTENNAS	304420	4.0	4.0	4.0	4.0	4.0	4.0
PANEL ANTENNAS	311135	5.2	4.4	4.2	10.1	10.6	8.2
	311155	5.2	4.4	4.2	10.1	10.6	8.2
	304451	5.2	4.4	4.2	10.1	10.6	8.2
	304471	5.2	4.4	4.2	10.1	10.6	8.2
	304452	5.2	4.4	4.2	10.1	10.6	8.2
	304472	5.2	4.4	4.2	10.1	10.6	8.2
	314453	5.2	4.4	4.2	10.1	10.6	8.2
	314473	5.2	4.4	4.2	10.1	10.6	8.2
	304424	2.0	2.0	2.0	4.0	4.0	4.0
4G OMNI BUILDING ANTENNAS	304421	2.0	2.0	2.0	4.0	4.0	4.0
4G OMNI PLUS BUILDING ANTENNAS	304422	2.0	2.0	2.0	5.0	5.0	5.0
	304423	2.0	2.0	2.0	5.0	5.0	5.0
CRADLE PLUS - PHONE CRADLE	301148	-5.0	0.7	-0.8	2.3	2.6	1.5
EXTERIOR BUILDING ANTENNAS	311141	0.7	4.0	3.6	-1.7	5.5	4.7
	311201	3.2	4.1	2.7	0.6	5.1	-7.5



# Accessories

## Building Antennas — External

**Yagi Antenna (3G)**  
**301111**

- 50 Ohm
- 700/800/900 MHz Directional
- w/ N Female Connector

**4G Omni-Directional Building Antenna**  
**304421**

- 75 Ohm F-Female Connector
- 698 – 960 / 1710 -2700 MHz

**4G Omni-Directional Building Antenna**  
**304424**

- 50 Ohm N-Female Connector
- 698 – 960 / 1710 -2700 MHz

**4G Omni-Directional Plus Building Antenna**  
**304422**

- 50 Ohm N-Female Connector
- 698 – 960 / 1710 -2700 MHz

**4G Omni-Directional Plus Building Antenna**  
**304423**

- 75 Ohm F-Female Connector
- 698 – 960 / 1710 -2700 MHz

**Wide Band Directional Antenna (4G)**  
**314411**

- 50 Ohm
- 700 - 2700 MHz
- w/ N Female Connector

**Pole Mount Panel Antenna (4G)**  
**314453**

- 50 Ohm
- 700 - 2700 MHz 50 Ohm Vertically Polarized
- w/ N Female Connector

**Pole Mount Panel Antenna (4G)**  
**314473**

- 75 Ohm
- 700-2700 MHz 75 Ohm Vertically Polarized
- w/ F Female Connector

**Wide Band Directional Antenna (4G)**  
**314475**

- 75 Ohm
- 700-2700 MHz
- w/ F Female Connector

## Building Antennas — Internal

**4G Dome Antenna**  
**304412**

- 50 ohm
- 698-960 / 1710-2700 MHz
- w/ 12 in. Pigtail N-Female
- w/ N Female Connector

**4G Dome Antenna**  
**304419**

- 75 Ohm
- 698-960 / 1710-2700 MHz
- w/ 12 in. Pigtail F Female
- w/ F Female Connector

**AG DT Panel Antenna Upgrade (4G)**  
**304447**

- 50 Ohm
- 700-2700 MHz 50 Ohm Vertically Polarized
- w/20 ft. RG58 Cable
- w/ N Male - SMA Male

**Ceiling Mount Panel Antenna (4G)**  
**304451**

- 50 Ohm
- 700-2700 MHz 50 Ohm Vertically Polarized
- w/N Female Connector
- w/Ceiling Mount

**Ceiling Mount Panel Antenna (4G)**  
**304471**

- 75 Ohm
- 700-2700 MHz 75 Ohm Vertically Polarized
- w/N Female Connector
- w/Ceiling Mount

**Wall Mount Panel Antenna (4G)**  
**311135**

- 50 Ohm
- 700-2700 MHz 50 Ohm Vertically Polarized
- w/N Female Connector

**Wall Mount Panel Antenna (4G)**  
**311155**

- 75 Ohm
- 700-2700 MHz 75 Ohm Directional
- w/F Female Connector

**4G Low-Profile Dome Antenna, with Reflector**  
**314406**

- 50 Ohm
- 608 - 2700 MHz
- w/ N-Female Connector
- w/ 19.7 in. Plenum cable

**4G Low-Profile Dome Antenna**  
**314407**

- 50 Ohm
- 608 - 2700 MHz
- w/ N-Female Connector
- w/ 19.7 in. Plenum cable

## Building Mounts



Signal 3G Mounting Plate  
**901138**



Two Piece L-Bracket For Use  
w/Omni-Directional Antenna  
**901133**



Antenna Pole Mounting  
Assembly  
**901117**

- U-Bracket Assembly
- Wall Mount Bracket
- 10 in. Length x 1.5 in. Diameter Aluminum Tube



In-Wall Panel Antenna  
Mount  
**901123**



Ceiling Mount for Panel  
Antenna  
**901140**



Pole Mount for Panel  
Antenna  
**901142**



Window Mount for Panel  
Antenna  
**901141**



Wall Mount for Panel  
Antenna  
**901143**

## Replacements



3dBi Dual Band Terminal Antenna for Signal  
Meter SMA Male Connector  
**311159**

## Tools



Compression Tool for RG11 Cable  
**992201**



Cable Prep Stripper Tool for RG11 Cable  
**992202**



Cable Prep Tool, Low Loss 400 Coax Cable,  
For all Connectors  
**992203**



Crimp Tool, N Type Coax Connectors  
**992204**

## Splitters



Splitter 3 Way -4.8 dB 700-2700MHz w/N Female Connectors, 50 Ohm  
**859980**



Splitter 4 Way -6 dB 700-2700MHz w/N Female Connectors, 50 Ohm  
**859981**



4 Port 700-2700 MHz Splitter w/F Female Connectors, 75 Ohm  
**859106**



Splitter 2 Way -3 dB 700-2800 MHz w/N Female Connectors, 50 Ohm  
**859957**




2 Port 700-2700 MHz Splitter w/F Female Connectors, 75 Ohm  
**859993**



3 port 700-2500 MHz Splitter w/F Female connectors, 75 Ohm  
**859994**


## Taps




-10 dB Tap 700-2500 MHz w/0.5 dB Pass Thru 50 Ohm (N Female Connector)  
**859907**



-7 dB Tap 700-2700 MHz w/1.5 dB Pass Thru 50 Ohm (N Female Connector)  
**859114**



-6 dB Tap 800 MHz w/ 1.5 dB Pass Thru w/ N Female Connectors, 50 Ohm  
**859906**



-10 dB Tap 700-2500MHz w/0.5dB Pass Thru 75 Ohm  
**859976**



-7 dB Tap 700-2700 MHz w/1.5 dB Pass Thru 75 Ohm (F Connector)  
**859115**

## Carrying Case



Portable Signal Booster Vented Soft Carrying Case  
**859924**

- Designed to help protect your signal booster
- Sturdy, shock-absorbing material
- Keeps components together and organized
- Quick and easy access
- Mobile to Mobile
- Mobile to Home/Office
- Bag only - all components sold separately

Dimensions: 10.5 x 9.5 x 2.5 (inch) / 26.67 x 24.13 x 6.35 (cm)

## Cables and Connectors



FME Female - TNC Female Connector  
**971104**



FME Female - Mini UHF Female Connector  
**971103**



FME Male - TNC Male Connector  
**971106**



N Female - FME Male Connector  
**971108**



N Female - FME Female Connector  
**971107**



FME Male - N Male Connector  
**971113**



SMA Male to FME Male Connector  
**971119**



N Female - N Female Barrel Connector  
**971117**



F Female - F Female Connector for RG6 Cable  
**971129**



N Male - F Female Connector  
**971128**



SMA Male to N Male Connector  
**971132**



F Female To TNC Male Adapter  
**971130**



N Male - N Male Connector  
**971148**



FME Female to SMA Female Connector  
**971136**



F-Male to N-Female Connector  
**971151**



SMA Female - TNC Male Connector  
**971155**



SMA Male - TNC Female Connector  
**971153**



N Female - SMA Male Connector  
**971156**



N Female - SMA Female Connector  
**971157**



SMA Male - SMA Male Barrel Connector  
**971163**



SMA Male to F Female Connector  
**971165**



N-Male Crimp Connector for use with WILSON400 Cable  
**971109**



TNC Male Crimp Connector for RG58 Cable  
**971111**



FME Female Crimp Connector for RG58U Cable  
**971114**



FME Male Crimp Connector for RG58 Cable  
**971115**



N Male Crimp Connector for RG58 Cable  
**971116**



SMA Male to RG58 Crimp Connector  
**971131**



SMA Male Crimp for RG174  
**971139**



F-Male Compression Connector for the RG11 Cable  
**971150**



F-Male Compression Connectors for the RG11 Cable, Quantity 10 Bagged  
**971150-10**

## Cables and Connectors



**RG11  
COAX CABLE  
F-MALE / F-MALE  
BLACK**

951127 2 feet      951100 100 feet  
951150 50 feet    951155 500 feet  
951175 75 feet<sup>1</sup>

<sup>1</sup>compatible with crimp connector 971150. Center pin from connector. Must be soldered onto cable.



**RG6  
LOW-LOSS COAX CABLE  
F-MALE / F-MALE  
WHITE**

950602 2 feet  
950620 20 feet  
950630 30 feet  
950650 50 feet



**WILSON400  
ULTRA LOW-LOSS COAX CABLE<sup>2</sup>  
N-MALE / N-MALE BLACK**

952302 2 feet      952360 60 feet  
952310 10 feet    952375 75 feet  
952320 20 feet    952300 100 feet  
952330 30 feet    952305 500 feet  
952350 50 feet    952301 1000 feet

<sup>2</sup>equivalent to LMR-400



**RG58 LOW-LOSS FOAM COAX CABLE  
SMA-FEMALE / SMA-MALE BLACK**

955805 5 feet  
951147 10 feet  
955815 15 feet

**SMA-FEMALE / SMA-MALE WHITE**

955823 20 feet

**N-MALE / SMA-MALE BLACK**

955802 2 feet      955822 20 feet  
955812 10 feet



**RG58U  
LOW-LOSS FOAM COAX CABLE  
N-MALE / N-MALE BLACK**

951134 2 feet

**EXTENTION CABLE  
SMA-MALE / SMA-FEMALE**

955832 30 feet



**RG174 CABLE  
SMA-MALE / SMA-MALE BLACK**

951151 3 feet

**RG174 EXTENSION CABLE  
SMA-MALE / FME-FEMALE BLACK**

951144 6 feet




**RG58U  
LOW-LOSS FOAM COAX CABLE  
N-MALE / N-MALE WHITE**

951148 20 feet



**FLAT WINDOW CABLE  
F-FEMALE / F-FEMALE  
WHITE**

951152 8 inch  
951177 10 inch



**COAX CABLE BLACK**

**SMA-MALE TO SMA-MALE**

951141 6 feet

**SMA-FEMALE TO SMA-MALE**

951130 6 feet



**PLENUM CABLE**

**LMR 400 Plenum Cable**

952002 500 ft. Spool

**Wilson400 Plenum Cable**

952001 500 ft. Spool

ACTUAL SIZE		LOSS PER 10'		
		800 MHz	1900 MHz	
	13/32"	Wilson 400	.45 dB	.7 dB
	13/32"	RG-11	.45 dB	.8 dB
	3/8"	RG-6	.83 dB	1.35 dB
	3/16"	RG-58	1.0 dB	2.66 dB
	3/32"	RG-174	3.58 dB	6.66 dB



## Attenuators



6 dB Attenuator, 50 Ohm (N Female Connectors)  
**859936**



10 dB Attenuator, 50 Ohm (N Female Connectors)  
**859926**



20 dB Attenuator, 50 Ohm (N Female Connectors)  
**859927**

## Lightning Surge Protector



Lightning Surge Protector w/N-Female Connectors, 50 Ohm  
**859902**



Lightning Surge Protector w/F-Female Connectors, 75 Ohm  
**859992**

## Combiner/Diplexer - Impedance Converter - Channelized Filters



### Combiner/Diplexer

Dual Band Diplexer/Combiner (50 Ohm, 800-900 MHz/1850-1990 MHz Bands)  
**859922**



### Impedance Converter

50 to 75 OHM Converter with N-Female Connector on 50 OHM Side and F-Female Connector on 75 OHM Side  
**859955**



B5 Channelized Filter Channel A (F Connector)  
**860001**



B5 Channelized Filter Channel B (F Connector)  
**860002**



B5 Channelized Filter Channel A (N Connector)  
**860003**



B5 Channelized Filter Channel B (N Connector)  
**860004**

## Power Supplies

BUILDING POWER SUPPLIES		DESCRIPTION	COMPATIBLE WITH
859969		AC/DC Building Power Supply 5V/2A with Mini USB Jack	470113, 460109
859900		AC/DC Power Supply 12V/3A with 2.5 x 12.5mm DC Plug	471104, 460027, 460127, 462027, 462034, 462127, 463034, 463227, 463134, 465034, 465134
859903		AC/DC 12V Power Supply with 2.5 x 5.5mm Jack	Designed for 12V signal boosters only
850003		120V AC to 5V DC 4A, DC Jack	474120, 473120, 470101, 470103, 470201
VEHICLE POWER SUPPLIES		DESCRIPTION	COMPATIBLE WITH
859110		DC/DC Power Supply 5.5V/2A with 3 ft USB Cable	470113
859913		DC/DC Vehicle Power Adapter 6V/2A with DC Jack	470210, 470510, 470108, 470102
859905		DC Hardwire Power Supply 12V/3A with DC Jack	470111
859923		DC Hardwire Power Supply 6V/2A with DC Jack	460219, 470102, 470108, 470510
859938		DC/DC 12V/3.3A Power Adapter	470111
859989		DC Hardwire Power Supply 5V/1A	470113, 460109
859983		DC/DC Vehicle Power Adapter 12V/2A with DC Jack	Designed for 12V signal boosters only
851111		Fused 12V to 5V/3A Hardwire Power Supply with 2.5mm DC Plug	470410
859111		DC/DC Power Supply 5.5V/2A with 5 ft USB to 2.55mm Jack	

# Warranty Overview

## 3 Year Warranty

### **The Best-In-Class Warranty for the most power signal boosters available from WilsonPro**

All WilsonPro.com orders are protected by a 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

3-Year Warranty WilsonPro Signal Boosters are warranted for three (3) years against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Signal Boosters may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by WilsonPro.

WilsonPro shall, at its option, either repair or replace the product. WilsonPro will pay for delivery of the repaired or replaced product back to the original consumer if located within the continental U.S.

This warranty does not apply to any Signal Booster determined by WilsonPro to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties. Failure to use a surge protected AC Power Strip with at least a 1000 Joule rating will void your warranty.

RMA numbers may be obtained by contacting **Customer Support at 866-294-1660**

## WILSONPRO PRODUCT CATALOG

### WilsonPro

3301 E. Deseret Drive  
St. George, Utah 84790

US 1-888-503-5329

CA 1-866-294-1660

Fax: 435-656-2432

[info@weboost.com](mailto:info@weboost.com)

### CUSTOMER SUPPORT

1-866-294-1660

[support.weboost.com](http://support.weboost.com)

[support@wilsonelectronics.com](mailto:support@wilsonelectronics.com)

### SALES

1-800-204-4104

### INTERNATIONAL SALES

[export@weboost.com](mailto:export@weboost.com)

 [facebook.com/WilsonProAmps/](https://facebook.com/WilsonProAmps/)

 [linkedin.com/company/wilson-electronics](https://linkedin.com/company/wilson-electronics)

 [youtube.com/user/WilsonElectronicsInc](https://youtube.com/user/WilsonElectronicsInc)



[www.wilsonpro.com](http://www.wilsonpro.com)