
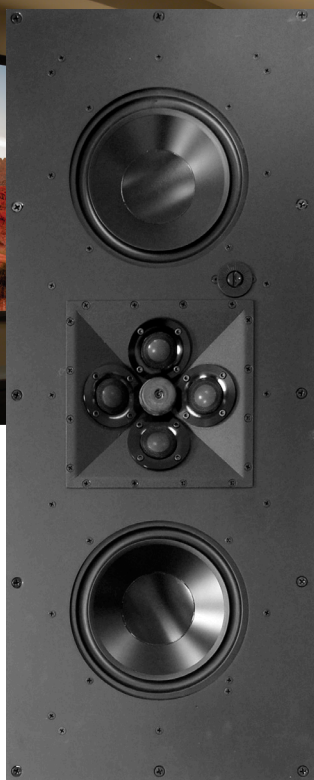


806BE BE-SERIES

3-WAY SHALLOW DEPTH IN-WALL REFERENCE LOUDSPEAKER

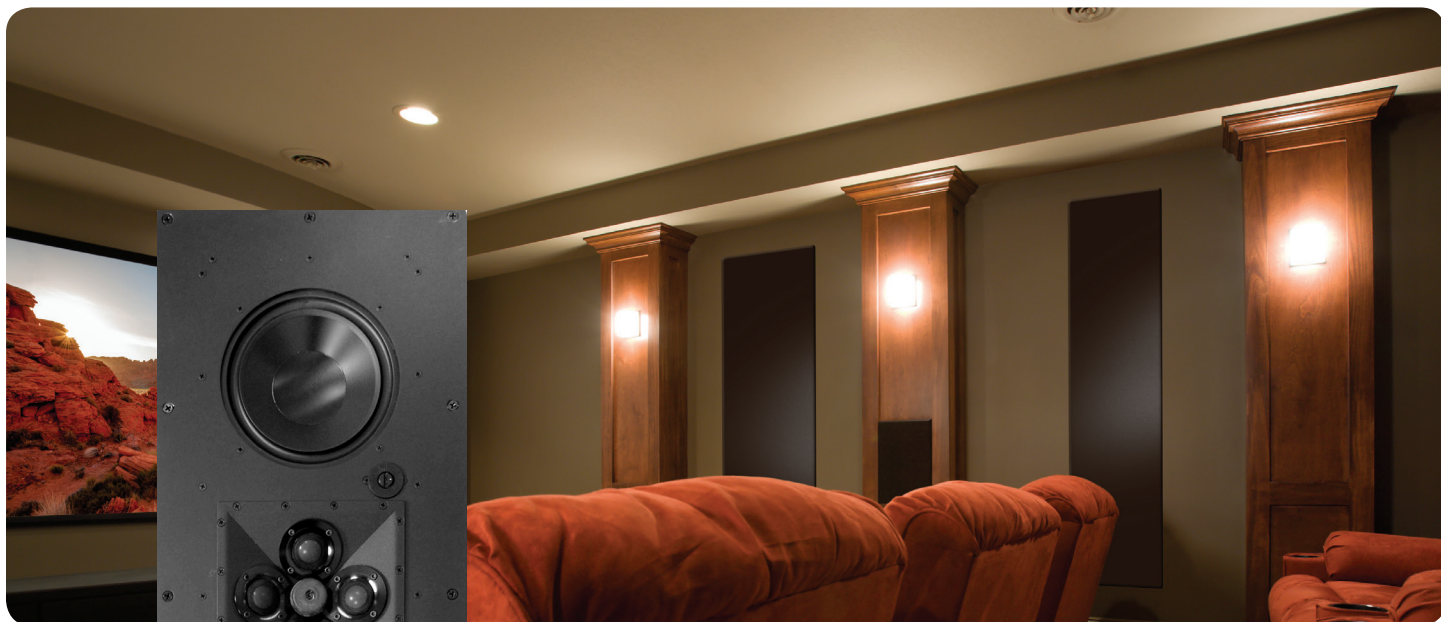


Size	32 h x 12.95 w x 3.875 d (in) 812 h x 329 w x 98 d (mm)
Freq Response	45Hz-40kHz \pm 3dB
Impedance	8 ohms
Sensitivity	96dB 2.83V/1m
Power req.	50-300 watts
Woofer	(2) 8" (203mm) Aluminum
Tweeter	(4) 1" (25mm) Beryllium
Grille	Black or White Cloth
PCB	Requires Framing


(2) 8" (203mm) High Excursion Aluminum Driver (4) 1" (25mm) Beryllium Dome Quad-Array Tweeters

The BE-series is James Loudspeaker's line of studio grade reference in-wall loudspeakers, designed and engineered for precision and sonic accuracy. There is nothing quite like the workmanship that goes into building these speakers; each unit is hand assembled, tested, and packaged by craftsman in the USA. The new 806BE in-wall reference loudspeaker features high output driver components, set into a solid aluminum baffle, coupled with James quad tweeter array, incorporating four 1" (25mm) beryllium dome tweeters in a 22.5° offset array for wide dispersion, high power handling, and low distortion promises to deliver only the best audiophile quality sound.

Perfect for home theaters and stereo systems, these in wall speakers deliver top quality sound while saving space in any environment. The truly superior quality and design of these speakers is immediately prevalent. Equipped with a high output aluminum cone woofer and a powerful aluminum cone mid-range driver, the 806BE has an impressive 95dB sensitivity, with bass down to 45Hz, and the beryllium dome tweeters deliver the most crisp, clear high frequencies available. The sealed cabinet design features all aircraft grade aluminum for strength, sonic performance, and suitability for outdoor/marine applications. Designed for easy installation into 2x4 stud walls, 16" on center, with some additional stud framing required. For outdoor/marine applications, order the 806BEM.



Black Cloth



Custom Paint



White Paintable



White Cloth

James
LOUDSPEAKER


2185 Park Place, Minden, NV 89423
Ph: 775.461.7500
www.jamesloudspeaker.com

THE APEX OF SOUND

20190821

808BE BE-SERIES

3-WAY SHALLOW DEPTH IN-WALL REFERENCE LOUDSPEAKER - BI-AMP AVAILABLE

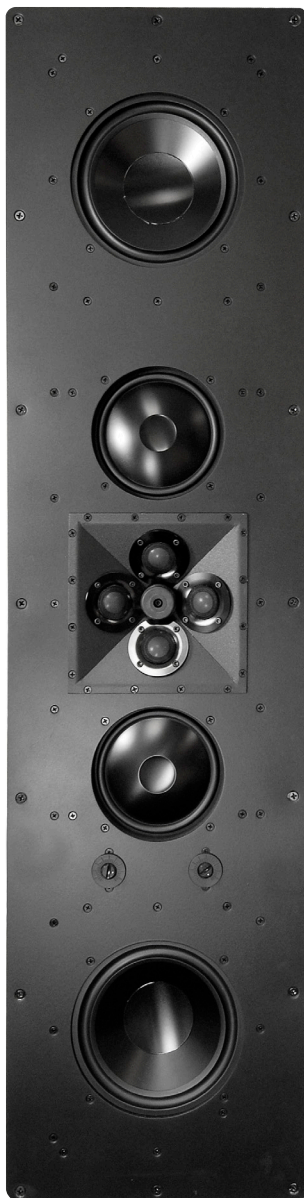


- (2) 8" (203mm) Aluminum Cone Woofers**
- (2) 6.5" (165mm) Neodymium Mid-Drivers**
- (4) 1" (25mm) Beryllium Dome Tweeters**

The BE-series is James Loudspeaker's line of studio grade reference in-wall loudspeakers, designed and engineered for precision and sonic accuracy. There is nothing quite like the workmanship that goes into building these speakers; each unit is hand assembled, tested, and packaged by craftsman in the USA. The 808BE in-wall reference loudspeaker features high output driver components, set into a solid aluminum baffle, coupled with James quad tweeter array, incorporating four 1" (25mm) beryllium dome tweeters in a 22.5° offset array for wide dispersion, high power handling, and low distortion promises to deliver only the best audiophile quality sound.

Perfect for home theaters and stereo systems, these in wall speakers deliver top quality sound while saving space in any environment. The truly superior quality and design of these speakers is immediately prevalent. Equipped with two high output aluminum cone woofers and a pair of powerful aluminum cone neodymium mid-range drivers, the 808BE has an impressive 98dB sensitivity, with bass down to 45Hz, and the beryllium dome tweeters deliver the most crisp, clear high frequencies available.

The sealed cabinet design features all aircraft grade aluminum for strength, sonic performance, and suitability for outdoor/marine applications. Designed for easy installation into 2x4 stud walls, 16" on center, with some additional stud framing required.

For outdoor/marine applications, order the 808BEM.



Size 50.625 h x 12.95 w x 3.875 d (in)
1286 h x 329 w x 98 d (mm)

Freq Response 45Hz-40kHz±3dB

Impedance 4 ohms

Sensitivity 98dB 2.83V/1m

Power req. 50-300 watts

Woofer (2) 8" (203mm) Aluminum

Mid (2) 6.5" (165mm) Neodymium

Tweeter (4) 1" (25mm) Beryllium

Grille Black or White Cloth

PCB Requires Framing

James
LOUDSPEAKER


2185 Park Place, Minden, NV 89423

Ph: 775.461.7500

www.jamesloudspeaker.com

THE APEX OF SOUND

20190821

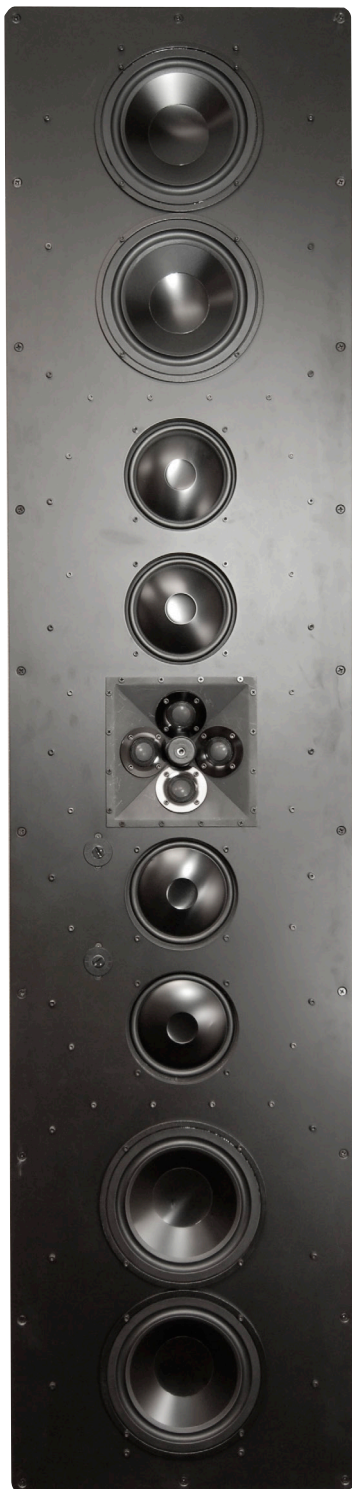

812BE BE-SERIES

4-WAY SHALLOW DEPTH IN-WALL REFERENCE LOUDSPEAKER - BI-AMP AVAILABLE



- (4) 8" (203mm) Aluminum Cone Woofers**
- (4) 6.5" (165mm) Neodymium Mid-Drivers**
- (4) 1" (25mm) Beryllium Dome Tweeters**

The BE-series is James Loudspeaker's line of studio grade reference in-wall loudspeakers, designed and engineered for precision and sonic accuracy. There is nothing quite like the workmanship that goes into building these speakers; each unit is hand assembled, tested, and packaged by craftsman in the USA. The new 812BE in-wall reference loudspeaker features high output driver components, set into a solid aluminum baffle, coupled with James quad tweeter array. Incorporating four 1" (25mm) beryllium dome tweeters in a 22.5° offset array for wide dispersion, high power handling, and low distortion promises to deliver only the best audiophile quality sound.



Perfect for home theaters and stereo systems, these in wall speakers deliver top quality sound while saving space in any environment. The truly superior quality and design of these speakers is immediately prevalent. Equipped with four high output aluminum cone woofers and two pairs of powerful aluminum cone neodymium mid-range drivers, the 812BE has an impressive 102dB sensitivity, with bass down to 40Hz, and the beryllium dome tweeters deliver the most crisp, clear high frequencies available.

The sealed cabinet design features all aircraft grade aluminum for strength, sonic performance, and suitability for outdoor/marine applications. Designed for easy installation into 2x4 stud walls, 16" on center, with some additional stud framing required. For outdoor/marine applications, order the 812BEM.

Size	75 h x 17.5 w x 3.875 d (in) 1905 h x 445 w x 98 d (mm)
Freq Response	40Hz-40kHz±3dB
Impedance	8 ohms
Sensitivity	102dB 2.83V/1m
Power req.	50-300 watts
Woofer	(4) 8" (203mm) Aluminum
Mid	(4) 6.5" (165mm) Neodymium
Tweeter	(4) 1" (25mm) Beryllium
Grille	Black or White Cloth
PCB	Requires Framing



2185 Park Place, Minden, NV 89423
Ph: 775.461.7500
www.jamesloudspeaker.com



THE APEX OF SOUND

20190821